

# Technical data sheet

## Fastening clip 1015 D, for direct fastening

Item number: 1009528



Single-lobe fastening clip for cables and pipes.



**St** Steel

**G** Electrogalvanized

### Master data

|                                    |                            |
|------------------------------------|----------------------------|
| Item number                        | 1009528                    |
| Type                               | 1015 D 8 OL G              |
| Description 1                      | Fastening clip             |
| Description 2                      | for 2 cables               |
| Manufacturer                       | OBO                        |
| Dimension                          | 8mm                        |
| Material                           | Steel                      |
| Surface                            | Electrogalvanized          |
| Surface standard                   | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit                | 100                        |
| Unit of quantity                   | Piece                      |
| Weight                             | 0.795 kg                   |
| Weight unit                        | kg/100 pc.                 |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0101 kg COe / 1 Piece    |


# Technical data sheet

## Fastening clip 1015 D, for direct fastening

Item number: 1009528



### Dimensions

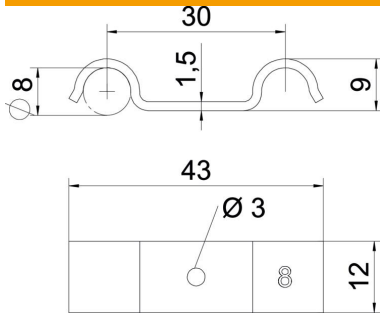

|             |        |
|-------------|--------|
| Length      | 43 mm  |
| Width       | 12 mm  |
| Height      | 8.5 mm |
| Dimension B | 12 mm  |
| Dimension H | 7 mm   |

### Technical data

|                                  |               |
|----------------------------------|---------------|
| Distance to the wall             | no            |
| Number of cables/pipes           | 2             |
| Version for                      | Single-lobe   |
| Fastening type                   | Miscellaneous |
| For diameter                     | 8             |
| Suitable in fire protection area | no            |
| Halogen-free                     | yes           |
| Plastic-covered                  | no            |
| Material thickness               | 1.5 mm        |
| UV-resistant                     | yes           |