


# Technical data sheet

## Reduction, PG thread

Item number: 2089130

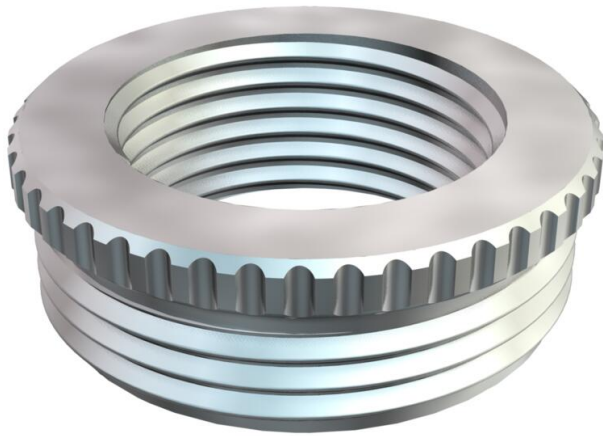

Reduction (Part H) to DIN 46320, with Pg thread to DIN 40430, as a transition from a PG thread hole to a smaller cable gland.

\* Prices according to DEL notation.



Brass



Nickel-plated

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 2089130                  |
| Type                               | 167 R MS PG13-11         |
| Description 1                      | Reduction                |
| Manufacturer                       | OBO                      |
| Dimension                          | PG13,5-PG11              |
| Material                           | Brass                    |
| Surface                            | Nickel-plated            |
| Surface standard                   |                          |
| Smallest sales unit                | 50                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 0.47 kg                  |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0137 kg CO2e / 1 Piece |


# Technical data sheet

Reduction, PG thread

Item number: 2089130



## Dimensions

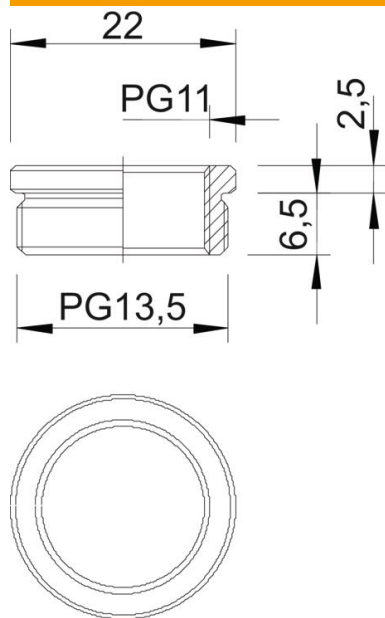

|              |        |
|--------------|--------|
| Dimension D  | 22 mm  |
| Dimension L1 | 6.5 mm |
| Dimension L2 | 2.5 mm |

## Technical data

|                                |        |
|--------------------------------|--------|
| explosion-proof                | no     |
| Thread type: External thread   | PG     |
| Thread type: Internal thread   | PG     |
| Thread length                  | 6.5 mm |
| Thread dimension, PG, external | 13.5   |
| Thread dimension, PG, internal | 11     |
| Nickel-plated                  | yes    |