


# Technical data sheet

## Variable earthing terminal

Item number: 5014425



- Suitable for connection for Rd 10 x FL 30, FL 30 x FL 30
- Quick mounting using a hexagonal bolt M10 x 20 (F)

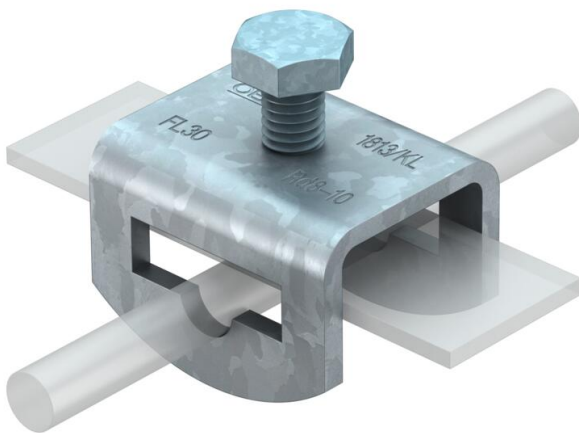

St

Steel

FT

Hot-dip galvanised

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 5014425                  |
| Type                               | 1813 KL                  |
| Description 1                      | Earth connection clamp   |
| Manufacturer                       | OBO                      |
| Dimension                          | 8-10xFL30                |
| Material                           | Steel                    |
| Surface                            | Hot-dip galvanised       |
| Surface standard                   | DIN EN ISO 1461          |
| Smallest sales unit                | 50                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 18 kg                    |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,3818 kg CO2e / 1 Piece |


# Technical data sheet

## Variable earthing terminal

Item number: 5014425



### Dimensions

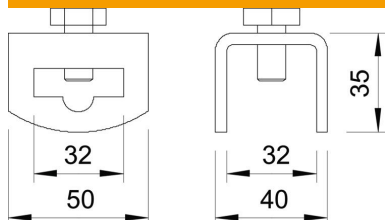

### Technical data

|                                     |                               |
|-------------------------------------|-------------------------------|
| Type of fastening screw             | Hexagonal bolt                |
| Type of connector                   | Multipurpose connection clamp |
| Lightning current carrying capacity | H/100 kA                      |
| Suitable for connection             | Miscellaneous                 |
| Fit                                 | FL30 x Rd 8-10 mm             |