

# Technical data sheet

## Clamp clip, U base, 3x single-wire connection

Item number: 1174541



Clip element, bolt and lock plate made of hot-dip galvanised steel, pressure and counter-trough made of polypropylene, halogen-free, light grey RAL 7035.

Delivered complete with lock plate and counter-troughs.  
The clamp clips 2056/U-E are used for systematic routing of single-wire cables in rotary current networks. As, with this routing type, the magnetic fields counteract each other, no heating is to be feared and steel clips can be used.  
2056/U-E is suitable for all profile rails of 18 or 22 mm slot width.



St

Steel

FT

Hot-dip galvanised

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 1174541                  |
| Type                               | 2056U-E31 FT             |
| Description 1                      | Clamp clip               |
| Description 2                      | for 3 single-wire cables |
| Manufacturer                       | OBO                      |
| Dimension                          | 28-31mm                  |
| Material                           | Steel                    |
| Surface                            | Hot-dip galvanised       |
| Surface standard                   | DIN EN ISO 1461          |
| Smallest sales unit                | 25                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 19.5 kg                  |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,5367 kg CO2e / 1 Piece |


# Technical data sheet

## Clamp clip, U base, 3x single-wire connection

Item number: 1174541



### Dimensions

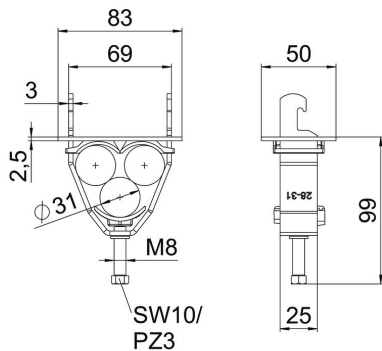

|             |        |
|-------------|--------|
| Dimension A | 83 mm  |
| Dimension B | 69 mm  |
| Dimension H | 107 mm |

### Technical data

|                                                |                |
|------------------------------------------------|----------------|
| Number of cables/pipes                         | 3              |
| for rail with slot width (with interval), max. | 22 mm          |
| for rail with slot width (with interval), min. | 18 mm          |
| Halogen-free                                   | yes            |
| Cable diameter, max.                           | 31 mm          |
| Cable diameter, min.                           | 28 mm          |
| Max. Tightening torque                         | 5 Nm           |
| With plastic trough                            | yes            |
| With metal trough                              | no             |
| Mounting type                                  | Profile rail   |
| Impact-resistant                               | no             |
| Clamping range D, max.                         | 31 mm          |
| Clamping range D, min.                         | 28 mm          |
| Surface addition                               | hot galvanised |
| Material addition                              | Steel          |
| With counter-trough                            | yes            |
| Material of trough                             | Plastic        |
| Material quality of trough                     | Polypropylene  |
| Material of counter-trough                     | Plastic        |