

# Technical data sheet

Fastening clip 605, medium duty, aluminium

Item number: 1017837



Fastening clip, double-lobe, 20 mm



Alu

Aluminium

| Master data                        |                         |  |
|------------------------------------|-------------------------|--|
| Item number                        | 1017837                 |  |
| Type                               | 605 20 ALU              |  |
| Description 1                      | Fastening clip          |  |
| Description 2                      | two lobe                |  |
| Manufacturer                       | OBO                     |  |
| Dimension                          | 20mm                    |  |
| Material                           | Aluminium               |  |
| Smallest sales unit                | 100                     |  |
| Unit of quantity                   | Piece                   |  |
| Weight                             | 0.228 kg                |  |
| Weight unit                        | kg/100 pc.              |  |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,043 kg CO2e / 1 Piece |  |


# Technical data sheet

## Fastening clip 605, medium duty, aluminium

Item number: 1017837



### Dimensions

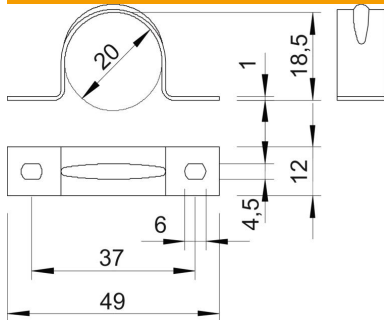

|             |         |
|-------------|---------|
| Length      | 49 mm   |
| Width       | 12 mm   |
| Height      | 18.5 mm |
| Dimension A | 49 mm   |
| Dimension B | 37 mm   |
| Dimension b | 12 mm   |
| Dimension D | 20 mm   |
| Dimension d | 4.5 mm  |
| Dimension e | 6 mm    |
| Dimension H | 18.5 mm |
| Dimension t | 1 mm    |

### Technical data

|                                  |            |
|----------------------------------|------------|
| Distance to the wall             | no         |
| Number of cables/pipes           | 1          |
| Version for                      | Two-lobe   |
| Fastening type                   | Screw hole |
| For diameter                     | 20         |
| Suitable in fire protection area | no         |
| Halogen-free                     | yes        |
| Plastic-covered                  | no         |
| Hole size                        | 4,5 x 6 mm |
| Material thickness               | 1 mm       |
| Nominal diameter                 | 20 mm      |
| Clamping range D, max.           | 20 mm      |
| Clamping range D, min.           | 20 mm      |
| UV-resistant                     | yes        |