Technical data sheet

Push-fit anchor for cable ties

Item number: 2351609





The push-fit anchor can accept a cable tie (type 550 or 555) up to 9 mm wide, which can be used to install several cables and pipes.

Suitable for concrete, lime sandstone and brickwork as solid brick. Use in gas concrete masonry is possible, but reduced load capacities must be expected.



PA

Polyamide

B.A			 _	_	4_
М	n s	414	м	ы	га


Item number	2351609
Type	910 STK 6x30
Description 1	Push-fit plug
Description 2	for cable ties
Manufacturer	OBO
Dimension	6x30mm
Colour	Light grey; RAL 7035
Material	Polyamide
Smallest sales unit	100
Unit of quantity	Piece
Weight	0.108 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to- Gate	0,0058 kg CO2e / 1 Piece

Technical data sheet

Push-fit anchor for cable ties





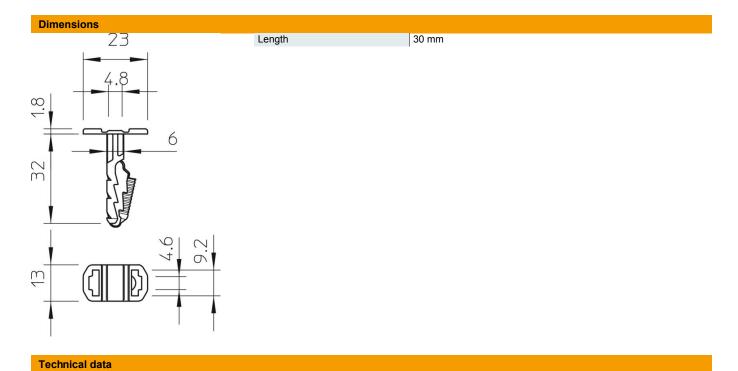

Common data		
	Version for	Push-fit anchor
	Drill hole depth	35 mm
	Drill hole diameter, min.	6 mm
	Breaking load for concrete B25	260 N
	Suitable for fastening with cable ties	yes
	Suitable for gas concrete	yes
	Suitable for hexagonal wood screw	no
	Halogen-free	yes
	With edge	yes
	With bolts	no