

# Technical data sheet

## Earthing strap, type 950

Item number: 5050138



- For pipes Ø 1/4"-2"
  - Connection options: conductors to 35 mm<sup>2</sup> or round conductors to Ø 6 mm
  - With captive pressure strip, 2 cylinder bolts M6 x 16 and 1 hex-head screw M6 x 16
- from galvanised steel, top and bottom part of clamp from die-cast zinc

|    |                   |
|----|-------------------|
| Zn | Die-cast zinc     |
| G  | Electrogalvanized |

### Master data

|                                    |                            |
|------------------------------------|----------------------------|
| Item number                        | 5050138                    |
| Type                               | 950 Z 1 1/4                |
| Description 1                      | Earthing clamp             |
| Description 2                      | for round conductor        |
| Manufacturer                       | OBO                        |
| Dimension                          | 1 1/4"                     |
| Material                           | Die-cast zinc              |
| Surface                            | Electrogalvanized          |
| Surface standard                   | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit                | 10                         |
| Unit of quantity                   | Piece                      |
| Weight                             | 10.03 kg                   |
| Weight unit                        | kg/100 pc.                 |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,3984 kg CO2e / 1 Piece   |


# Technical data sheet

## Earthing strap, type 950

Item number: 5050138



### Dimensions

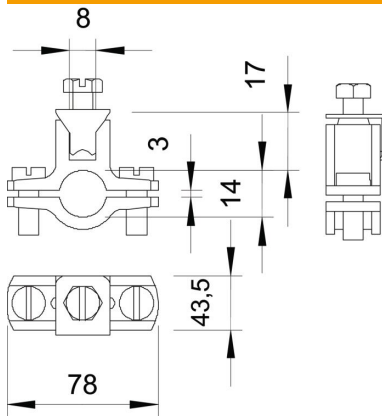

|             |         |
|-------------|---------|
| Dimension A | 78 mm   |
| Dimension D | 43.5 mm |
| Dimension X | 3 mm    |

### Technical data

|                                              |                    |
|----------------------------------------------|--------------------|
| Number of conductors                         | 1                  |
| Cross-section of cable to be connected, max. | 35 mm <sup>2</sup> |
| Cross-section of cable to be connected, min. | 0 mm <sup>2</sup>  |
| Clamping range D                             | 1 1/4              |
| Clamping range D, max.                       | 43.5 mm            |
| Clamping range D, min.                       | 40.5 mm            |