

Technical data sheet

Cover frame AR45-BSF3, for accessory mounting box 71GD9-2, triple, with labelling panel for vertical device installation



Front locking cover frame for Modul 45 devices, triple, with labelling panel for vertical device installation, for locking in accessory mounting box 71GD9-2 or in mounting support 71MT3 45-2.
For installation in Rapid 80 device installation trunking and ISS service poles.

PC Polycarbonate

Master data


| | |
|------------------------------------|--------------------------|
| Item number | 6119387 |
| Type | AR45-BSF3 RW |
| Description 1 | Cover frame |
| Description 2 | for triple Modul 45 |
| Manufacturer | OBO |
| Dimension | 84x185mm |
| Colour | Pure white; RAL 9010 |
| Material | Polycarbonate |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 2.8 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,2263 kg CO2e / 1 Piece |

Technical data sheet

**Cover frame AR45-BSF3, for accessory mounting box
71GD9-2, triple, with labelling panel for vertical device in-
stallation**

OBO
BETTERMANN

Dimensions

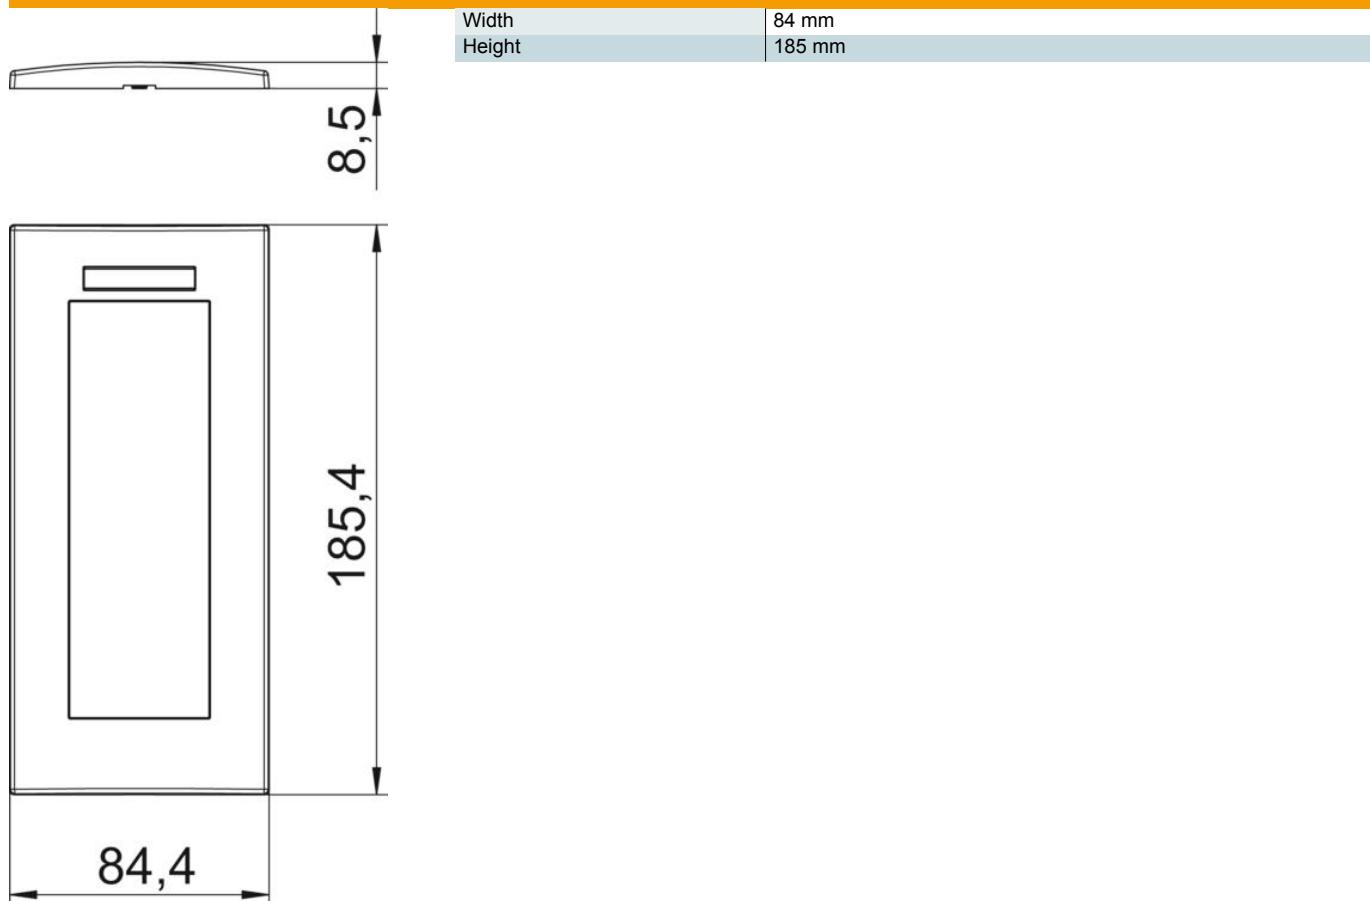

Technical data sheet

Cover frame AR45-BSF3, for accessory mounting box 71GD9-2, triple, with labelling panel for vertical device installation



Technical data

| | |
|--|-----------------|
| Number of units | 3 |
| Number of units, horizontal | 0 |
| Anzahl der Einheiten vertikal | 3 |
| Surface version | Matt |
| Fastening type | Clamp fastening |
| Suitable for built-in installations | yes |
| Suitable for device installation ducts | yes |
| Suitable for underfloor duct socket | no |
| Suitable for flush-mounted installations | no |
| Halogen-free | yes |
| Hinged cover | no |
| Mounting direction | Vertical |
| Protection rating | Other |
| Text field/inscription field | yes |
| Depth | 8.5 mm |
| Transparent | no |
| With mounting frame | no |
| Diameter opening | 0 |