

# Technical data sheet

End piece BRA ES 70170

Item number: 6133293



End piece as a fitting for the Signa Style device installation trunking.  
For a clean end to the trunking system. For attaching to the trunking ends.



|     |           |
|-----|-----------|
| Alu | Aluminium |
| EL  | Anodised  |

## Master data

|                                    |                             |
|------------------------------------|-----------------------------|
| Item number                        | 6133293                     |
| Type                               | BRA ES70170 EL              |
| Description 1                      | End piece                   |
| Description 2                      | SIGNA STYLE 70x170 anodised |
| Manufacturer                       | OBO                         |
| Dimension                          | 70x170x37                   |
| Colour                             | aluminium                   |
| Material                           | Aluminium                   |
| Surface                            | Anodised                    |
| Surface standard                   |                             |
| Smallest sales unit                | 1                           |
| Unit of quantity                   | Piece                       |
| Weight                             | 11.5 kg                     |
| Weight unit                        | kg/100 pc.                  |
| CO2 Footprint (GWP) Cradle-to-Gate | 2,1059 kg CO2e / 1 Piece    |


# Technical data sheet

End piece BRA ES 70170

Item number: 6133293



## Dimensions

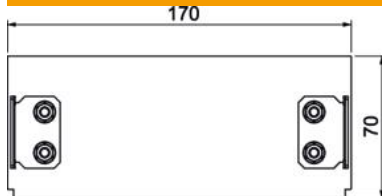

|        |        |
|--------|--------|
| Length | 37 mm  |
| Width  | 170 mm |
| Height | 70 mm  |

## Technical data

|                                   |            |
|-----------------------------------|------------|
| Version for                       | Universal  |
| Fastening type                    | Lockable   |
| for duct width                    | 170 mm     |
| for trunking height               | 70 mm      |
| Suitable for                      | Left/right |
| Halogen-free                      | yes        |
| Cut lamination                    | no         |
| Protection rating                 | IP30       |
| Protective film                   | yes        |
| Protection rating IK code         | IK07.      |
| Permitted temperature range, max. | 60 °C      |
| Permitted temperature range, min. | -5 °C      |