

# Technical data sheet

## Clamp clip 2056 F-foot, 1-fold, plastic pressure sleeve, FT

Item number: 1187656



Clamp clip with F-foot, plastic pressure sleeve made of polypropylene. For vertical and horizontal mounting of 1 single cable on flat bars. With 1-start screw thread on pressure sleeve, universal hexagonal screw head WAF10, with slot and cross recess. Suitable for assembly indoors and outdoors. We recommend the use of a counter-sleeve.



St

Steel

FT

Hot-dip galvanized

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 1187656                  |
| Type                               | BS-F1-K-64 FT            |
| Description 1                      | Clamp clip 2056          |
| Manufacturer                       | OBO                      |
| Dimension                          | 58-64mm                  |
| Material                           | Steel                    |
| Surface                            | Hot-dip galvanized       |
| Surface standard                   | DIN EN ISO 1461          |
| Smallest sales unit                | 50                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 14.8 kg                  |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,3092 kg CO2e / 1 Piece |


# Technical data sheet

Clamp clip 2056 F-foot, 1-fold, plastic pressure sleeve, FT

Item number: 1187656



## Dimensions

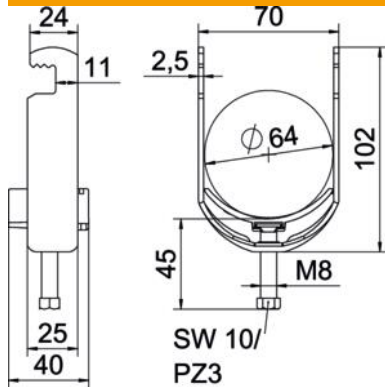

|                  |        |
|------------------|--------|
| Length           | 25 mm  |
| Width            | 70 mm  |
| Height           | 102 mm |
| Plate thickness  | 2.5 mm |
| Dimension A      | 25 mm  |
| Dimension B      | 70 mm  |
| Dimension C      | 40 mm  |
| Dimension G (mm) | M8     |
| Dimension H      | 102 mm |
| Dimension L      | 45 mm  |
| Dimension t      | 2.5 mm |

## Technical data

|                               |                |
|-------------------------------|----------------|
| Number of cables/pipes        | 1              |
| For pipe diameter, max.       | 64 mm          |
| For pipe diameter, min.       | 58 mm          |
| Thread                        | M8             |
| Halogen-free                  | yes            |
| Length of external dimensions | 40 mm          |
| Max. Tightening torque        | 5 Nm           |
| With plastic trough           | yes            |
| With metal trough             | no             |
| Mounting type                 | Flat profile   |
| Slot width                    | 10 mm          |
| Clamping range D, max.        | 64 mm          |
| Clamping range D, min.        | 58 mm          |
| Surface addition              | hot galvanised |
| Material addition             | Steel          |
| With counter-trough           | no             |
| Material of trough            | Plastic        |
| Material quality of trough    | Polypropylene  |