

# Technical data sheet

## Clamp clip 2056 H-foot, 1-fold, metal pressure sleeve, A2

Item number: 1186169



Clamp clip with hammerhead foot, metal pressure sleeve with rounded edges to protect the cable. For vertical and horizontal mounting of 1 single cable on a C-profile rail. For a slot width 16–17 mm. With 1-start screw thread on pressure sleeve, universal hexagonal screw head WAF10, with slot and cross recess. Suitable for assembly indoors and outdoors. We recommend the use of a counter-sleeve.



**A2** Stainless steel

**2B** Bright, treated

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 1186169                  |
| Type                               | BS-H1-M-70 A2            |
| Description 1                      | Clamp clip 2056          |
| Manufacturer                       | OBO                      |
| Dimension                          | 64-70mm                  |
| Material                           | Stainless steel 1.4301   |
| Surface                            | Bright, treated          |
| Surface standard                   |                          |
| Smallest sales unit                | 15                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 16.1 kg                  |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,8794 kg CO2e / 1 Piece |


# Technical data sheet

## Clamp clip 2056 H-foot, 1-fold, metal pressure sleeve, A2

Item number: 1186169



### Dimensions

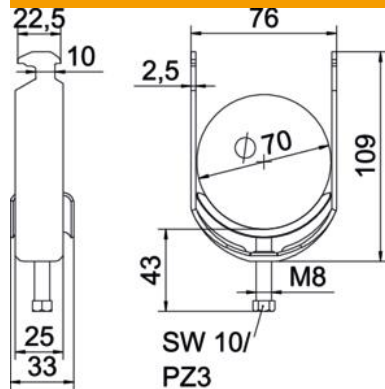

|                  |        |
|------------------|--------|
| Length           | 25 mm  |
| Width            | 76 mm  |
| Height           | 109 mm |
| Plate thickness  | 2.5 mm |
| Dimension A      | 25 mm  |
| Dimension B      | 76 mm  |
| Dimension C      | 33 mm  |
| Dimension G (mm) | M8     |
| Dimension H      | 109 mm |
| Dimension L      | 43 mm  |
| Dimension t      | 2.5 mm |

### Technical data

|                                                |                              |
|------------------------------------------------|------------------------------|
| Number of cables/pipes                         | 1                            |
| Maintain electrical functions                  | yes                          |
| For pipe diameter, max.                        | 70 mm                        |
| For pipe diameter, min.                        | 64 mm                        |
| for rail with slot width (with interval), max. | 17 mm                        |
| for rail with slot width (with interval), min. | 16 mm                        |
| Thread                                         | M8                           |
| Halogen-free                                   | yes                          |
| Length of external dimensions                  | 33 mm                        |
| Max. Tightening torque                         | 5 Nm                         |
| With plastic trough                            | no                           |
| With metal trough                              | yes                          |
| Mounting type                                  | Profile rail                 |
| Slot width                                     | 10 mm                        |
| Clamping range D, max.                         | 70 mm                        |
| Clamping range D, min.                         | 64 mm                        |
| Surface addition                               | Untreated                    |
| Material addition                              | Rustproof steel              |
| With counter-trough                            | no                           |
| Material of trough                             | Rustproof steel              |
| Material quality of trough                     | Stainless steel 304 (1.4301) |