



Technical data sheet

Falling vertical bend for PYROLINE® Con S BSKH09-K0506
fire protection duct
Item number: 7215660

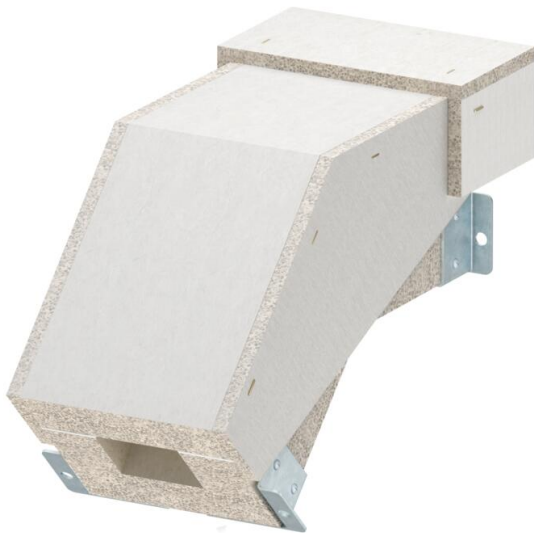

Falling vertical bend for PYROLINE® Con S fire protection duct, type BSKH09-K0506, consisting of fibreglass lightweight concrete which is resistant to water and frost for the creation of vertical changes of direction (45°) of the duct. Mounted connectors ensure quick mounting in situ, whilst loosely placed covers ensure quick inspection and reassignment.

Including connection screws and sealing strips.
Including connection screws and sealing strips.



Fibreglass lightweight concrete

Master data


| | |
|---------------------|---------------------------------|
| Item number | 7215660 |
| Type | BSKH09-VF0506 |
| Description 1 | Vertical bend falling |
| Description 2 | for BSKH09-K0506 |
| Manufacturer | OBO |
| Dimension | 50x60 |
| Colour | Grey |
| Material | Fibreglass lightweight concrete |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 577 kg |
| Weight unit | kg/100 pc. |

Technical data sheet

Falling vertical bend for PYROLINE® Con S BSKH09-K0506
fire protection duct
Item number: 7215660



Dimensions

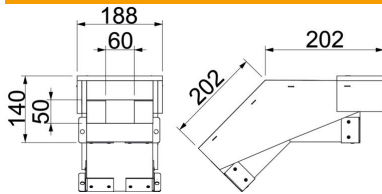

| | |
|---------------------|-----------|
| External dimensions | 188 x 140 |
| Internal dimensions | 60 x 50 |
| Width | 188 mm |
| Dimension B | 188 mm |
| Dimension b | 60 mm |
| Dimension h | 50 mm |
| Dimension H | 140 mm |
| Dimension L | 202 mm |

Technical data

| | |
|--|----------------------------------|
| Number of flammable sides | 4 |
| Cover fastening | Loose |
| Fire resistance class E – function maintenance | 30 |
| Fire resistance class I – installation duct | 90 |
| With perforation | no |
| Partitions possible | yes |
| Jacketing | Without |
| Material of the insulation | Glass-fibre lightweight concrete |
| Angle of the bend | 45 ° |