


# Technical data sheet

## MMS-plus MS mounting rail tie, with flat panhead

Item no. 3498262

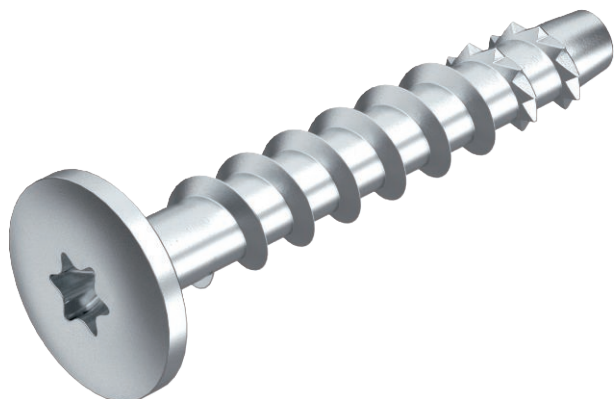

Bolt tie for direct mounting without additional anchors in cracked and uncracked concrete and masonry. With large round head to fasten mounting and profile rails. Torx drive T30. Construction product tested according to EAD and CE mark, with European Technical Assessment (ETA) and proof of suitability. Load-bearing capacities under fire loads proven up to fire resistance class R120.




St Steel

Galvanised

### Master data

Item no.	3498262
Type	MMS+ MS 7.5x60
Description 1	Rail anchor
Description 2	with flange head
Dimension	7,5x60
Material description	Steel
Material	Steel
Material symbol	St
Interface description	Galvanised
Surface	Galvanised
Surface symbol	VZ
Smallest sales unit (VG)	50 Piece
Weight	1,80 kg/100 pc.

### Technical data



Length	60,00 mm
Dimension L	60,00 mm
Dimension	7,5 x 60 mm
Drill hole diameter	6,00 mm
Anchor length	60,00 mm
Head diameter	17,00 mm
Head shape	Other
Head shape	Other
Thread	7,5
Screw system	Torx
Screw system	Torx



T30