


Technical data sheet

MMS-plus P round head tie, with panhead

Item no. 3498105

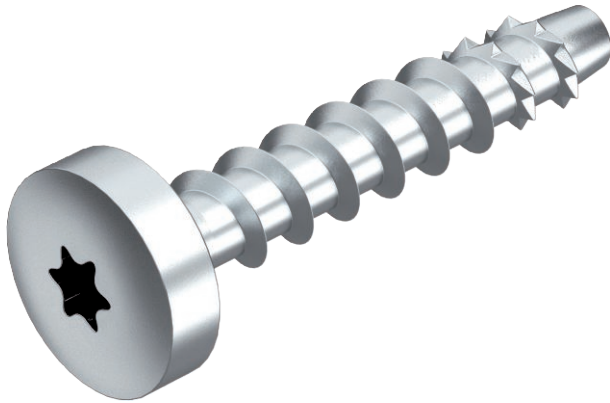

Bolt tie for direct mounting without additional anchors in cracked and uncracked concrete and masonry. With round head for universal fastenings. Torx drive T30.
Construction product tested according to EAD and CE mark, with European Technical Assessment (ETA) and proof of suitability. Load-bearing capacities under fire loads proven up to fire resistance class R120.

Substrate

The screw ties are suitable for screwing into the following types of masonry:

- Calcareous sandstone - Full brick (KSV)
- Calcareous sandstone - Hollow brick (KSL)
- Whole brick (Vz)




St Steel

Galvanised

Master data

Item no.	3498105
Type	MMS+ P 6x40
Description 1	Screw anchor
Description 2	with panhead
Dimension	6x40mm
Material description	Steel
Material	Steel
Material symbol	St
Interface description	Galvanised
Surface	Galvanised
Surface symbol	VZ
Smallest sales unit (VG)	100 Piece
Weight	1,00 kg/100 pc.

Technical data

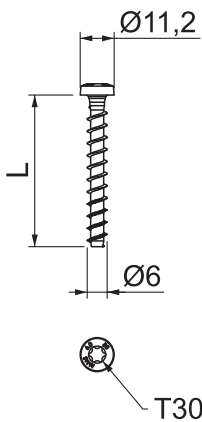

Length	40,00 mm
Dimension L	40,00 mm
Dimension	6 x 40 mm
Anchor/nail/bolt version	Spiral anchor
Drill hole diameter	5,00 mm
Anchor length	40,00 mm
Head diameter	11,20 mm
Head shape	Other
Head shape	Other
Screw system	Torx
Screw system	Torx