Technical data sheet

Data technology support, 1 module, slanting outlet, type C, without dust protection slider ltem number: 6119290





Data technology support with slanting outlet and without a locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening. The type C data technology support (without dust protection slider) is suitable for accepting the following data connection modules: 3M: Volition K6, K10 and Cat. 6A

For installation in Rapid 45 and Rapid 80 device installation trunking, ISS service poles and underfloor systems.

PC

Polycarbonate


Master data

Item number	6119290
Туре	DTS-02C AL1
Description 1	Data technology support
Description 2	f. 2 connection modules type C
Manufacturer	OBO
Dimension	45x45mm
Colour	Aluminium painted
Material	Polycarbonate
Smallest sales unit	1
Unit of quantity	Piece
Weight	1.4 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to- Gate	0,1251 kg CO2e / 1 Piece

Technical data sheet

Data technology support, 1 module, slanting outlet, type C, without dust protection slider Item number: 6119290



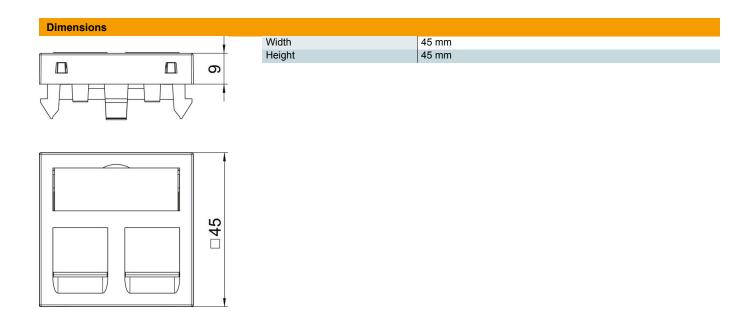

Number of units Surface version Matt Fastening type Lock Labelling panel With labelling panel Halogen-free Hinged cover Lamp-wire connector With printed label No With dust protection Mounting opening Protection rating Depth Support ring Transparent Use Strain relief option Combination Matt I		
Fastening type Lock Labelling panel With labelling panel Halogen-free yes Hinged cover no Lamp-wire connector with printed label no With dust protection Mounting opening Type C Protection rating Depth 26 mm Support ring Transparent Use Installable data connector Strain relief option With labelling panel yes yes no	Number of units	1
Labelling panel With labelling panel Halogen-free yes Hinged cover no Lamp-wire connector no With printed label no With dust protection no Mounting opening Type C Protection rating IP20 Depth 26 mm Support ring no Transparent no Use Installable data connector Strain relief option	Surface version	Matt
Halogen-free yes Hinged cover no Lamp-wire connector no With printed label no With dust protection no Mounting opening Type C Protection rating IP20 Depth 26 mm Support ring no Transparent no Use Installable data connector Strain relief option no	Fastening type	Lock
Hinged cover no Lamp-wire connector no With printed label no With dust protection no Mounting opening Type C Protection rating IP20 Depth 26 mm Support ring no Transparent no Use Installable data connector Strain relief option no	Labelling panel	With labelling panel
Lamp-wire connector no With printed label no With dust protection no Mounting opening Type C Protection rating IP20 Depth 26 mm Support ring no Transparent no Use Installable data connector Strain relief option no	Halogen-free	yes
With printed label no With dust protection no Mounting opening Type C Protection rating IP20 Depth 26 mm Support ring no Transparent no Use Installable data connector Strain relief option no	Hinged cover	no
With dust protection no Mounting opening Type C Protection rating IP20 Depth 26 mm Support ring no Transparent no Use Installable data connector Strain relief option no	Lamp-wire connector	no
Mounting opening Type C Protection rating IP20 Depth 26 mm Support ring no Transparent no Use Installable data connector Strain relief option no	With printed label	no
Protection rating IP20 Depth 26 mm Support ring no Transparent no Use Installable data connector Strain relief option no	With dust protection	no
Depth 26 mm Support ring no Transparent no Use Installable data connector Strain relief option no	Mounting opening	Type C
Support ring no Transparent no Use Installable data connector Strain relief option no	Protection rating	IP20
Transparent no Use Installable data connector Strain relief option no	Depth	26 mm
Use Installable data connector Strain relief option no	Support ring	no
Strain relief option no	Transparent	no
·	Use	Installable data connector
Combination Basic element with central cover plate	Strain relief option	no
	Combination	Basic element with central cover plate

Technical data