

Technical data sheet

33° socket, with earthing pin, triple

Item no. 6120262



Socket with earthing pin Triple 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250V ~, with connection terminals to IEC 60884-1.

For installation in Rapid 45 trunking, device installation trunking, service poles, underfloor systems and desk boxes.




PC Polycarbonate

Master data

Item no.	6120262
Type	STD-F3 RW3
Description 1	Socket 33°, triple
Description 2	with earth pin
Dimension	250V, 10/16A
Colour	Pure white
RAL number	9010
Material	Polycarbonate
Material symbol	PC
Smallest sales unit (VG)	1 Piece
Weight	10,50 kg/100 pc.

Technical data

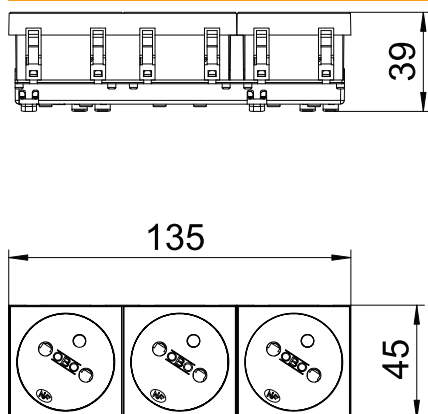

Width	135,00 mm
Height	45,00 mm
Depth	39,00 mm
Cover	Central plate
Closable	<input type="checkbox"/>
Connection type	Screwless terminal
Printed label/coding	Without printing
Version	Triple 33°
Version	Socket 33°, triple, with earth pin
Surface version	Matt
Sockets/switch version	Protective contact pin
Version for	Protective contact pin
Number of poles	2
Number of units	3
Number of modules (for modular construction)	3
Number of switchable sockets	0
Ejection mechanism	<input type="checkbox"/>
Fastening type	Lock
Labelling panel	<input type="checkbox"/>
Operating temperature	-5,00 - 40,00 °C
Error current protection	<input type="checkbox"/>
For more difficult conditions (according to VDE)	<input type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
Insulated installation	<input type="checkbox"/>
Increased touch protection	<input checked="" type="checkbox"/>
Hinged cover	<input type="checkbox"/>
Coding	No

Technical data sheet

33° socket, with earthing pin, triple

Item no. 6120262



Technical data

Warning light	<input type="checkbox"/>
With on/off switch	<input type="checkbox"/>
With fine-wire fuse	<input type="checkbox"/>
With functional lighting	<input type="checkbox"/>
With orientation lighting	<input type="checkbox"/>
Mounting type	Device installation duct
Nominal voltage	250,00 V
Nominal current	16,00 A
Protection rating	Other
Special power supply	Without special power supply
Socket version	NF
Socket angle	33°
Transparent	<input type="checkbox"/>
Surge protection	<input type="checkbox"/>
Rotated central insert	<input checked="" type="checkbox"/>