

Technical data sheet

Flat angle, for device installation trunking Rapid 45-2 type
GA-53130
Item number: 6112530



90° aluminium flat angle for direction change of Rapid 45-2 GA... device installation trunking.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by permitted scatter due to the material and process conditions cannot be avoided (according to DIN 17 611). 45 mm devices can be clicked in directly. When using PC/ABS hood fittings, there may be colour differences due to the different materials.



Alu Aluminium

Master data


Item number	6112530
Type	GA-FS53130RW
Description 1	Flat angle
Description 2	Aluminium, rigid form
Manufacturer	OBO
Dimension	53x130x225
Colour	Pure white; RAL 9010
Material	Aluminium
Smallest sales unit	1
Unit of quantity	Piece
Weight	119.9 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	17,4961 kg CO2e / 1 Piece

Technical data sheet

Flat angle, for device installation trunking Rapid 45-2 type
GA-53130
Item number: 6112530



Dimensions

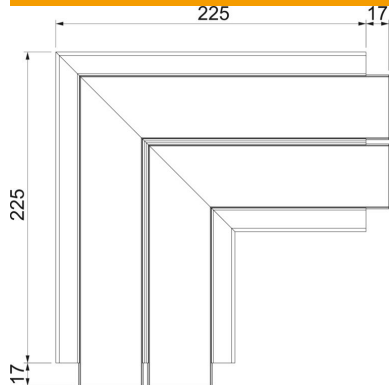

Length	225 mm
Width	130 mm
Height	53 mm

Technical data

Number of covers	2
Version for	Base and cover
for duct width	130 mm
for trunking height	53 mm
Halogen-free	yes
Cable retaining clip	no
Duct connector	no
Cover mounting type	Internal
Mounting perforation in base	no
Cover width	45 mm
Cover width 2	45 mm
Change of direction	Vertical, rising/falling
Protection rating	IP40
Protective film	yes
Protection rating IK code	IK10
Symmetrical	yes
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-15 °C
Angle range, min.	90 mm