


Technical data sheet

Internal corner, for device installation trunking Rapid 45-2
type GA-53130
Item number: 6112523

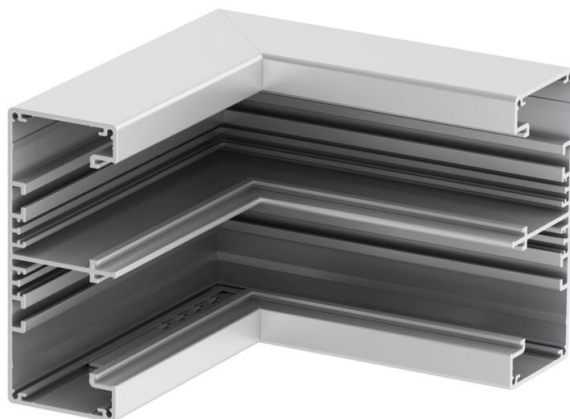

Corner 90° aluminium for changing the direction of device installation trunking Rapid 45-2 GA...

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by permitted scatter due to the material and process conditions cannot be avoided (according to DIN 17 611). 45 mm devices can be clicked in directly. When using PC/ABS hood fittings, there may be colour differences due to the different materials.



Alu Aluminium

EL Anodised

Master data

Item number	6112523
Type	GA-IS53130EL
Description 1	Internal corner
Description 2	Aluminium, rigid form
Manufacturer	OBO
Dimension	53x130x175
Colour	aluminium
Material	Aluminium
Surface	Anodised
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	89.2 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	11,3972 kg CO2e / 1 Piece


Technical data sheet

Internal corner, for device installation trunking Rapid 45-2
type GA-53130

Item number: 6112523



Dimensions

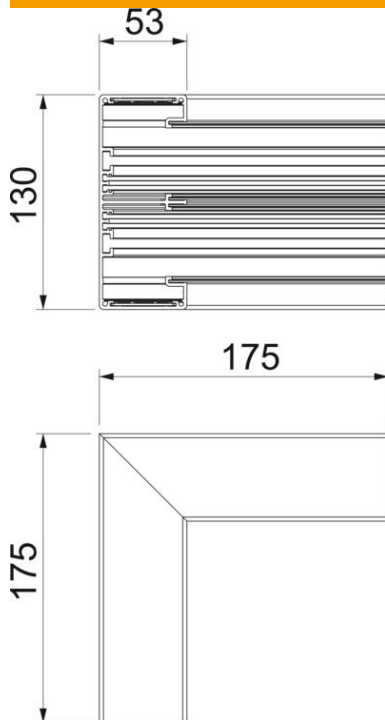

Length	175 mm
Width	130 mm
Height	53 mm

Technical data

Number of covers	2
Version for	Base
Shape	Symmetrical
for duct dimension	53 x 130 mm
for duct width	130 mm
for trunking height	53 mm
Halogen-free	yes
Cable retaining clip	no
Duct connector	no
Cover mounting type	Internal
Mounting perforation in base	no
Cover width	45 mm
Cover width 2	45 mm
Protection rating	IP40
Protective film	yes
Protection rating IK code	IK10
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-15 °C
Angle range, min.	90 mm