Technical data sheet

GES6 service outlet, used in raised floors

Item number: 7405260





Service unit for 6 installation devices in 3 UT universal supports for use in raised floors for indoor use. Fastening bracket in a clamping range of up to 50 mm plate thickness.

Carpet protection frame, hinged lid and cord outlet made of polyamide.

5 mm floor covering recess in the hinged lid.
Up to 9 individual Modul 45® devices can be installed.
Can also be used in conjunction with the MT mounting support. Three APMT5 cover plates can be installed for 6 installation devices. The number of installable installation devices depends on the type of installation devices.





Polyamide

Master data


7405260
GES6 DB 7011
Service outlet
for raised floor mounting
OBO
273x220x61
Iron grey; RAL 7011
Polyamide
1
Piece
163.4 kg
kg/100 pc.
2,2081 kg CO2e / 1 Piece

Technical data sheet

GES6 service outlet, used in raised floors



Item number: 7405260

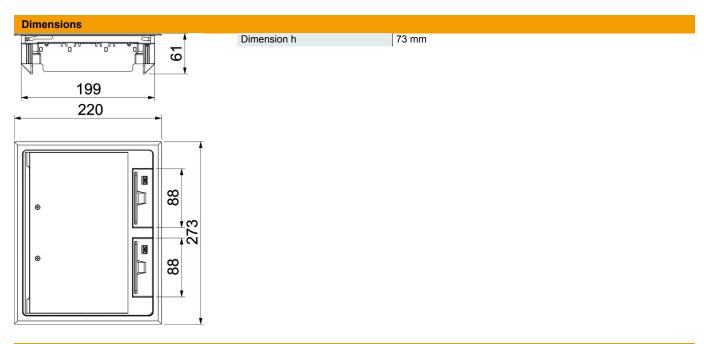

	nica	

Number of mounting boxes	3
Version for	
7 0.0.0.1 10.	Rectangular
Cable outlet version	Swivellable cord outlet
Floor covering protection frame	yes
Floor care	Dry
Seal installation option	no
Floor height, min.	73 mm
Suitable for raised floor installation	yes
Suitable for screed-flush closed underfloor ducts	no
Suitable for cavity floor installation	yes
Suitable for wet care	no
Suitable for underfloor box	250/350
Suitable for underfloor ducts	no
Device support to accept mounting boxes	yes
Length of external dimensions	220 mm
Length of installation dimensions	199 mm
With floor covering recess	yes
Frame version	Carpet protection frame
Protection rating (IP) when used	IP20
Protection rating (IP) when unused	IP40
Protection rating IK code	IK08
Heavy-duty version	no
Clamping range D, max.	62 mm
Clamping range D, min.	22 mm
Approvals	VDE
	u .

Technical data sheet

GES6 service outlet, used in raised floors



Item number: 7405260

Technical data		
	Opening mechanism	Handle
	Floor covering thickness	5 mm