

Technical data sheet

Underfloor box with GES9UGE

Item number: 7429699



Square screed socket with GES9 UGE service outlet for use in screed floors in indoor areas. With pre-marked insertion openings for pipelines (M25) on all four sides. The delivery includes a cover plate APMT5 blank and a cover plate for 4 data connections of type LUJ6C as well as 1 cover plate APMT5 with double socket switched. The minimum installation depth is 64 mm, the height-adjustment range +23 mm.

The scope of delivery contains three cover plates: A blank version, one switched with a double BS socket and one for the installation of four data connection sockets of type LJ6UC.



PA Polyamide

Master data

| | |
|------------------------------------|---------------------------|
| Item number | 7429699 |
| Type | GES9 BOX 7011 V |
| Description 1 | Service outlet-Set |
| Description 2 | for BS sockets |
| Manufacturer | OBO |
| Dimension | 264x264x91 |
| Colour | Iron grey; RAL 7011 |
| Material | Polyamide |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 290 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 12,7726 kg CO2e / 1 Piece |


Technical data sheet

Underfloor box with GES9UGE


Item number: 7429699



Dimensions



| | |
|--------|--------|
| Length | 264 mm |
| Width | 264 mm |

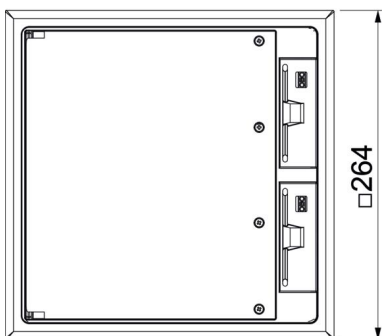

Technical data

| | |
|---|-------------------------|
| Number of installable devices | 12 |
| Number of mounting boxes | 3 |
| Cable outlet version | Swivellable cord outlet |
| Floor covering protection frame | yes |
| Floor care | Dry |
| Seal installation option | no |
| Screed height, max. | 85 mm |
| Screed height, min. | 65 mm |
| Floor height, max. | 95 mm |
| Floor height, min. | 72 mm |
| Suitable for raised floor installation | no |
| Suitable for screed-flush closed underfloor ducts | no |
| Suitable for screed-covered underfloor ducts | no |
| Suitable for cavity floor installation | no |
| Suitable for wet care | no |
| Suitable for underfloor ducts | no |
| Device support to accept mounting boxes | yes |
| Length of external dimensions | 264 mm |
| With floor covering recess | yes |
| Nominal size for device installation units | 9 |
| Height-adjustment range, max. | 85 mm |
| Height-adjustment range, min. | 65 mm |
| Frame version | Carpet protection frame |
| Protection rating (IP) when used | IP20 |
| Protection rating (IP) when unused | IP40 |
| Protection rating IK code | IK08 |

Technical data sheet

Underfloor box with GES9UGE

Item number: 7429699



Technical data

| | |
|---------------------------|------------|
| Heavy-duty version | no |
| Installation system type | MT4 |
| Vertical load, large area | to 3,000 N |
| Vertical load, small area | to 2,000 N |
| Opening mechanism | Handle |
| Floor covering thickness | 10 mm |