

Technical data sheet

End piece, for device installation trunking Rapid 80 type
GKH-70130
Item number: 6114280



End piece made of halogen-free PC/ABS for closing the GKH device installation trunking.



Polycarbonate/Acrylnitrile-butadiene-styrene

Master data

| | |
|------------------------------------|--|
| Item number | 6114280 |
| Type | GKH-E70130RW |
| Description 1 | End piece halogen-free |
| Manufacturer | OBO |
| Dimension | 70x130 |
| Colour | Pure white; RAL 9010 |
| Material | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 5.203 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,3801 kg CO2e / 1 Piece |


Technical data sheet

End piece, for device installation trunking Rapid 80 type
GKH-70130

Item number: 6114280



Dimensions

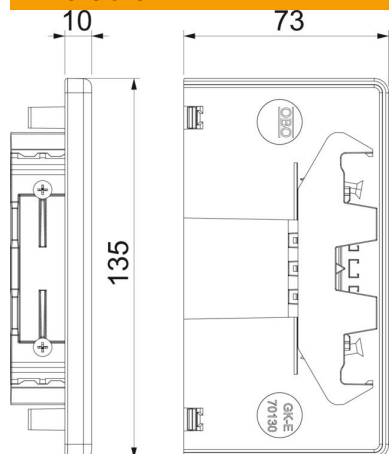

| | |
|--------|--------|
| Length | 29 mm |
| Width | 135 mm |
| Height | 73 mm |

Technical data

| | |
|--------------------------------------|-------------|
| Version for | Symmetrical |
| Fastening type | Lockable |
| for duct width | 130 mm |
| for trunking height | 70 mm |
| Suitable for | Left/right |
| Halogen-free | yes |
| Cut lamination | yes |
| Protection rating | IP30 |
| Protective film | no |
| Protection rating IK code | IK08 |
| Permitted temperature range, max. | 90 °C |
| Permitted temperature range, min. | -15 °C |