

Technical data sheet

Flat angle, for device installation trunking Rapid 80 type
GKH-70130
Item number: 6114240



Flat angle made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.

Cover must be ordered separately.



Polycarbonate/Acrylnitrile-butadiene-styrene

Master data

Item number	6114240
Type	GKH-F70130RW
Description 1	Flat angle, halogen-free
Manufacturer	OBO
Dimension	70x130
Colour	Pure white; RAL 9010
Material	Polycarbonate/Acrylnitrile-butadiene-styrene
Smallest sales unit	1
Unit of quantity	Piece
Weight	66 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	5,9504 kg CO2e / 1 Piece


Technical data sheet

Flat angle, for device installation trunking Rapid 80 type
GKH-70130

Item number: 6114240



Dimensions

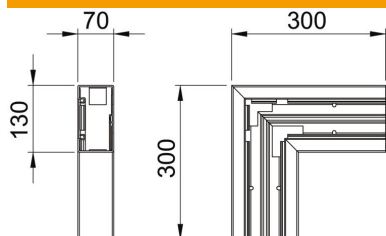

Length	300 mm
Width	130 mm
Height	70 mm

Technical data

Number of covers	1
Version for	Base
for duct width	130 mm
for trunking height	70 mm
Halogen-free	yes
Cable retaining clip	no
Duct connector	no
Cover mounting type	Internal
Mounting perforation in base	yes
Cover width	76.5 mm
Cover width 2	0 mm
Cover width 3	0 mm
Change of direction	Vertical, rising/falling
Protection rating	IP30
Protective film	yes
Protection rating IK code	IK08
Symmetrical	yes
Permitted temperature range, max.	90 °C
Permitted temperature range, min.	-15 °C
Angle range, max.	90 mm
Angle range, min.	90 mm