

Technical data sheet

Flat angle, asymmetrical, falling, for device installation
trunking Rapid 80 type GS-A90210
Item number: 6278130



Flat angle, falling, for changing the direction of the GS device installation trunking.



St Steel


Master data	
Item number	6278130
Type	GS-AFF90210RW
Description 1	Flat angle
Description 2	falling asymmetrical
Manufacturer	OBO
Dimension	90x210x300
Colour	Pure white; RAL 9010
Material	Steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	175 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	8,0491 kg CO2e / 1 Piece

Technical data sheet

Flat angle, asymmetrical, falling, for device installation
trunking Rapid 80 type GS-A90210
Item number: 6278130



Dimensions

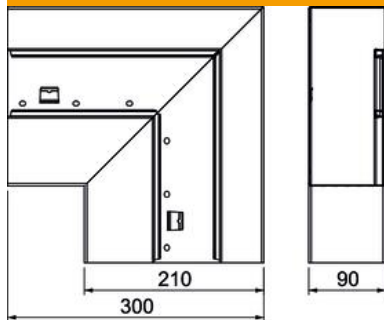

Length	300 mm
Width	210 mm
Height	90 mm

Technical data

Number of covers	1
Version for	Base
for duct width	210 mm
for trunking height	90 mm
Halogen-free	yes
Cable retaining clip	no
Duct connector	no
Cover mounting type	Internal
Mounting perforation in base	yes
Cover width	76.5 mm
Change of direction	Vertical, falling
Protection rating	IP30
Protective film	yes
Protection rating IK code	IK10
Symmetrical	no
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-25 °C
Angle range, min.	90 mm