


# Technical data sheet

External corner, asymmetrical, double, for device installation on trunking Rapid 80 type GS-D70170

Item number: 6278210



External corner for changing the direction of the GS device installation trunking.

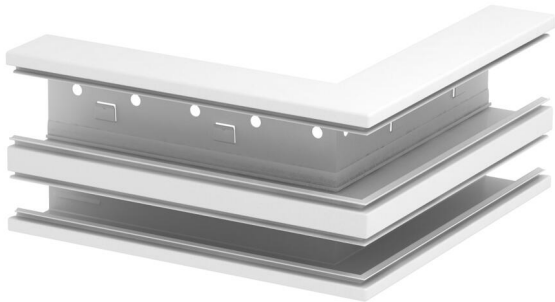


St Steel

## Master data

Item number	6278210
Type	GS-DA70170RW
Description 1	External corner
Description 2	asymmetrical
Manufacturer	OBO
Dimension	70x170x300
Colour	Pure white; RAL 9010
Material	Steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	270 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	15,5652 kg CO2e / 1 Piece

## Dimensions

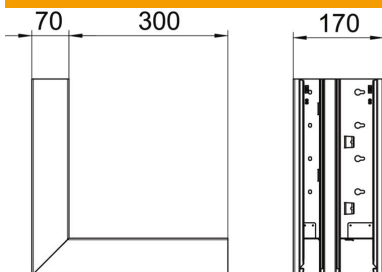

Length	300 mm
Width	170 mm
Height	70 mm

# Technical data sheet

External corner, asymmetrical, double, for device installation trunking Rapid 80 type GS-D70170

Item number: 6278210



## Technical data

Number of covers	2
Version for	Base
for duct width	170 mm
for trunking height	70 mm
Halogen-free	yes
Cable retaining clip	no
Duct connector	no
Cover mounting type	Internal
Mounting perforation in base	yes
Cover width	76.5 mm
Cover width 2	45 mm
Protection rating	IP30
Protective film	yes
Protection rating IK code	IK10
Symmetrical	no
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-25 °C
Angle range, min.	90 mm