

Technical data sheet

Service pole, type ISS110100R

Item number: 6289063



ISS aluminium service pole with a thin tube to the ceiling.

Set consists of:

1 single-compartment pole with clamping fastening


Total length 3,315–3,480 mm

1 clamping device for clamping to the ceiling

1 equipable aluminium installation area

Length: 780 mm

In areas for device installation, the service pole has a 76.5 mm system opening and is suitable for accepting front-locking accessory mounting boxes of the series 71GD...



Alu Aluminium

EL Anodised

Master data

| | |
|------------------------------------|----------------------------|
| Item number | 6289063 |
| Type | ISS110100REL |
| Description 1 | Service pole |
| Description 2 | floor/ceiling |
| Manufacturer | OBO |
| Dimension | 3000x100x110 |
| Colour | aluminium |
| Material | Aluminium |
| Surface | Anodised |
| Surface standard | |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 1000 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 132,0844 kg CO2e / 1 Piece |


Technical data sheet

Service pole, type ISS110100R

Item number: 6289063



Dimensions

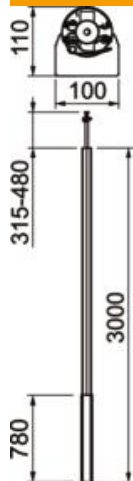

| | |
|--------|----------|
| Length | 3,000 mm |
| Width | 100 mm |
| Height | 110 mm |

Technical data

| | |
|-------------------------------|---|
| Number of usable covers | 1 |
| Number of compartments | 1 St. |
| Version for | Single-sided |
| Fastening type | Tension |
| Floor mounting | yes |
| Ceiling mounting | yes |
| Continuous profile | no |
| Halogen-free | yes |
| Height compensation, max. | 480 mm |
| Height compensation, min. | 315 mm |
| Cable entry | Top/bottom |
| Cover width | 76.5 mm |
| Changes according to location | no |
| Pole shape | Installation space, angular/pole, round |
| Pole height, max. | 3480 mm |
| Pole height, min. | 3315 mm |
| Adjustable | yes |
| Pre-wired | no |