

Technical data sheet

Cable tray MKS 60

Item no. 6056016



MKS 60 = Medium-duty cable tray system with a side height of 60 mm.

Connecting parts should be ordered in the appropriate quantity.

Magnetic shield insulation without cover 20 dB, with cover 50 dB.



VA Stainless steel, rustproof 1.4301

2B Bright, reworked

Master data

Item no.	6056016
Type	MKS 610 A2
Description 1	Cable tray MKS
Description 2	perforated
Manufacturer	OBO
Dimension	60x100x3000
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Surface	Bright, reworked
Surface symbol	2B
Smallest sales unit (VG)	3 m
Weight	174,20 kg/100 m

Technical data

Usable cross-section	5.800,00 mm ²
Usable cross-section	58,00 cm ²
Suitable for maintaining electrical function	☐
Connector version	Without connectors
With cover	☐
Mounting perforation in base	☒
NATO hole pattern	☐
Rustproof steel, pickled	☐
Side perforation	☒
Wide-span version	☐

Technical data sheet


Cable tray MKS 60

Item no. 6056016



Technical data

Dimensions

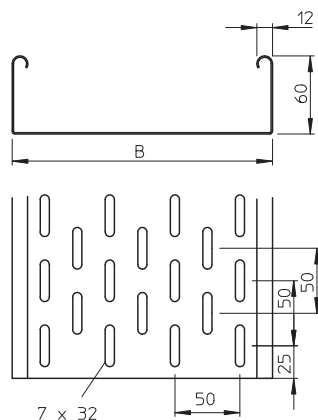


Length	3.000,00 mm
Width	100,00 mm
Height	60,00 mm
Side height	60,00 mm
Dimension B	100,00 mm
Plate thickness	1,00 mm

Appr. load:

Support spacing 1.5 m	1,50 kN/m
Support spacing 1.75 m	1,25 kN/m
Support spacing 2.0 m	1,00 kN/m
Support spacing 2.5 m	0,50 kN/m

Load diagram, cable tray MKS 60 VA

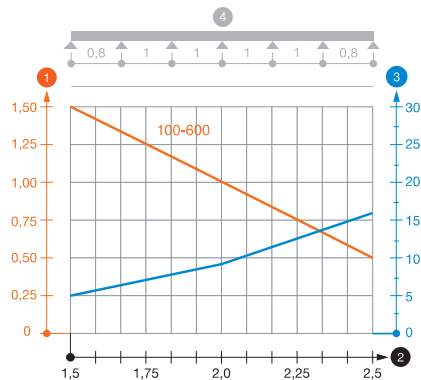

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width