


Technical data sheet

Cable tray SKS-Magic® 60, unperforated

Item no. 6059734

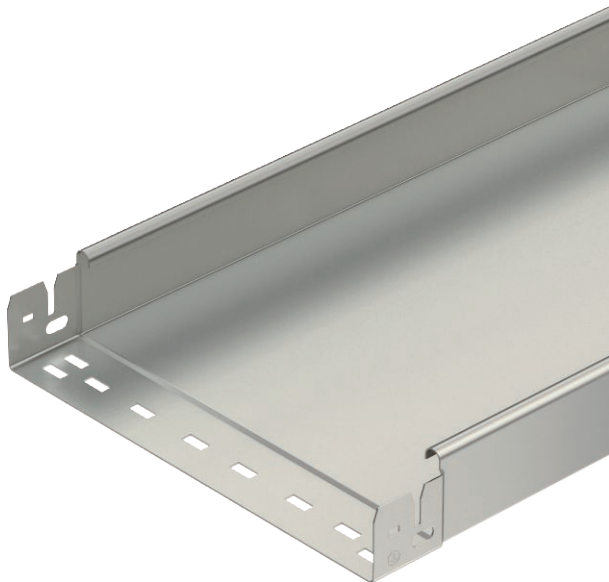

Unperforated cable tray with integrated quick fastening system. The usable length of the cable tray is 3,000 mm.

The continuous equipotential bonding is guaranteed without additional components.



VA Stainless steel, rustproof 1.4301

2B Bright, reworked

Master data

Item no.	6059734
Type	SKSMU 660 A2
Description 1	Cable tray SKSMU
Description 2	unperforated, quick connector
Manufacturer	OBO
Dimension	60x600x3050
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Surface	Bright, reworked
Surface symbol	2B
Smallest sales unit (VG)	3 m
Weight	889,97 kg/100 m

Technical data

	Usable cross-section	35.800,00 mm ²
	Usable cross-section	358,00 cm ²
	Suitable for maintaining electrical function	☐
	Connector version	Integrated connector
	With cover	☐
	Mounting perforation in base	☐
	NATO hole pattern	☐
	Rustproof steel, pickled	☐
	Side perforation	☐
	Wide-span version	☐

Technical data sheet


Cable tray SKS-Magic® 60, unperforated

Item no. 6059734



Technical data

Dimensions

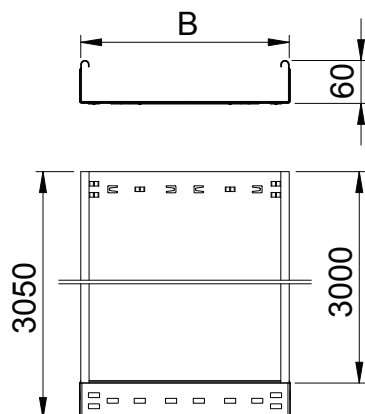


Length	3.050,00 mm
Width	600,00 mm
Height	60,00 mm
Side height	60,00 mm
Dimension B	600,00 mm
Plate thickness	1,50 mm

Appr. load:

Support spacing 1.5 m	2,60 kN/m
Support spacing 2.0 m	1,90 kN/m
Support spacing 2.5 m	1,10 kN/m
Support spacing 3.0 m	0,55 kN/m

Load diagram, cable tray, type SKSMU 60

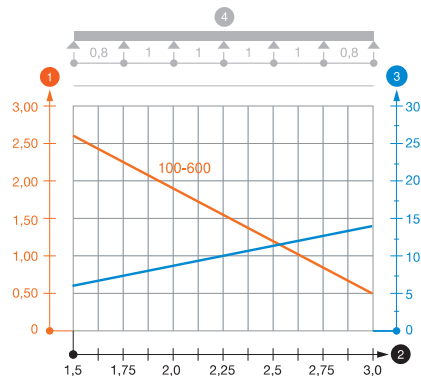

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width