

# Technical data sheet

90° bend 60 FS

Item number: 6211422



Horizontal 90° bend, fitting for cable ladders, side height 60 mm With connector perforation. Can be used in indoor areas. Connector and fastening material must be ordered separately. Fittings must be supported by the support structure.



|    |                  |
|----|------------------|
| St | Steel            |
| FS | Strip galvanized |

## Master data

|                                    |                              |
|------------------------------------|------------------------------|
| Item number                        | 6211422                      |
| Type                               | LB 90 620 R5 FS              |
| Description 1                      | 90° bend                     |
| Description 2                      | for cable ladder, horizontal |
| Manufacturer                       | OBO                          |
| Dimension                          | 60x200                       |
| Colour                             | zinc                         |
| Material                           | Steel                        |
| Surface                            | Strip galvanized             |
| Surface standard                   | DIN EN 10346                 |
| Smallest sales unit                | 1                            |
| Unit of quantity                   | Piece                        |
| Weight                             | 358 kg                       |
| Weight unit                        | kg/100 pc.                   |
| CO2 Footprint (GWP) Cradle-to-Gate | 8,9262 kg CO2e / 1 Piece     |


# Technical data sheet

90° bend 60 FS

Item number: 6211422



## Dimensions

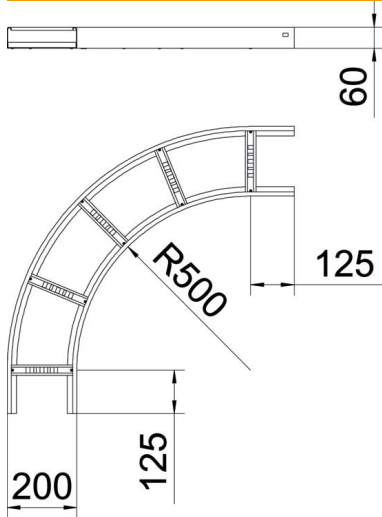

|             |        |
|-------------|--------|
| Width       | 200 mm |
| Height      | 60 mm  |
| Dimension B | 200 mm |
| Dimension R | 200 mm |

## Technical data

|                               |                      |
|-------------------------------|----------------------|
| Bend (angle)                  | 90°                  |
| Version of the rungs          | Profile unperforated |
| Side rail version             | Flat profile         |
| Maintain electrical functions | no                   |
| Change of direction           | Horizontal           |
| Rustproof steel, pickled      | no                   |
| Hinged                        | no                   |
| Side perforation              | no                   |
| Wide-span version             | no                   |
| Rail thickness                | 1.5 mm               |