

Technical data sheet

Cable trunking, type LKM 60100

Item no. 6248624



Trunking cover and base with base perforation. Equipotential bonding is guaranteed between the cover and the base without any additional aids. The LKM cable trunking, type LKM 60100FS, has been tested for the maintenance of electrical function as a routing system according to DIN 4102 Part 12. Please note the cable types tested in the BSS fire protection systems division!

The base contains loop perforation allowing the attachment of the partition.




St Steel

FSK Strip galvanised/powder-coated

Master data

Item no.	6248624
Type	LKM60100RW
Description 1	Cable trunking
Description 2	with base perforation
Dimension	60x100x2000
Colour	Pure white
RAL number	9010
Material	Steel
Material symbol	St
Surface	Strip galvanised/powder-coated
Surface to DIN	DIN EN 10346
Surface symbol	FSK
Smallest sales unit (VG)	2 m
Weight	221,70 kg/100 m

Technical data

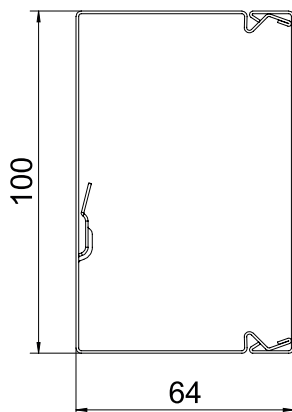

Length	2.000,00 mm
Width	100,00 mm
Height	64,00 mm
lampDimension WxH	100x64 mm
Number of fixed partitions	0
Number of insertable partitions	1
Cover version	Loose
Fastening type	Base perforation
Halogen-free	<input checked="" type="checkbox"/>
Cable retaining clip	<input type="checkbox"/>
Duct connector	<input type="checkbox"/>
Usable cross-section	56,76 cm ²
Protective film	<input type="checkbox"/>