


Technical data sheet

Wiring trunking, type LK4H N 10060

Item no. 6132572

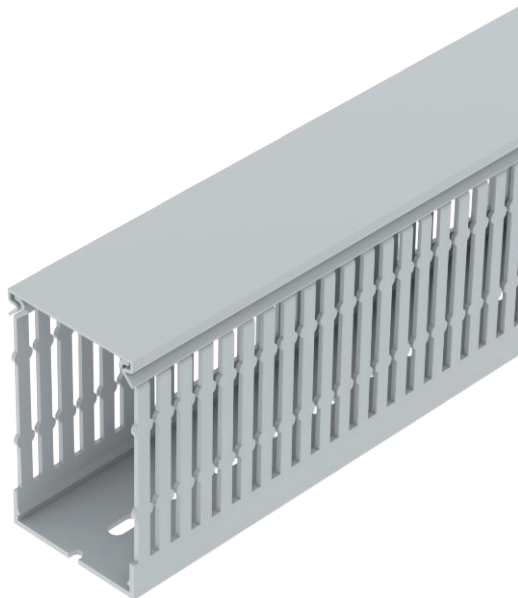

Halogen-free wiring trunking for horizontal and vertical routing in the switchgear cabinet.

Direct mounting on the wall via the integrated base perforation (with double-sided adhesive tape as mounting aid). Flame-retardant and self-extinguishing after removal of an active flame. The retainers in the trunking base can be broken out without tools.



PC/
ABS


Polycarbonate/acrylonitrile butadiene styrene

Product text, standards	Tested to DIN EN 50085-2-3.
Product text, scope of delivery	Base and cover in set.

Master data

Item no.	6132572
Type	LK4H N 10060
Description 1	Slotted cable trunking system
Description 2	halogen-free
Colour	Light grey
RAL number	7035
Material	Polycarbonate/acrylonitrile-butadiene-styrene
Material symbol	PC/ABS
Smallest sales unit (VG)	2 m
Weight	66,00 kg/100 m

Technical data

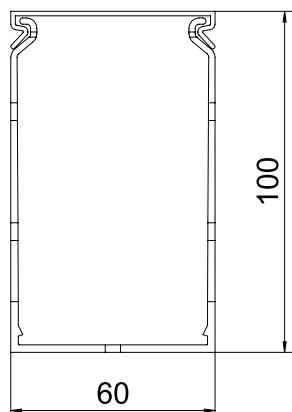

Length	2.000,00 mm
Width	60,00 mm
Height	100,00 mm
Side wall version	Slotted
Fastening type	Base perforation
Flexible	☐
Creepage current-resistant	☒
With cover	☒
Usable cross-section	5.265,00 mm ²
Halogen-free	☒
Slot spacing	5,50 mm
Slot width	4,50 mm
Self-extinguishing	☒