


# Technical data sheet

## 110 FT cross-over

Item number: 6219708



Cross-over for the creation of horizontal branches, fitting for cable ladders of side height 110 mm. With connector perforation. Can be used indoors and outdoors. Connector and fastening material must be ordered separately. Fittings must be supported by the support structure.

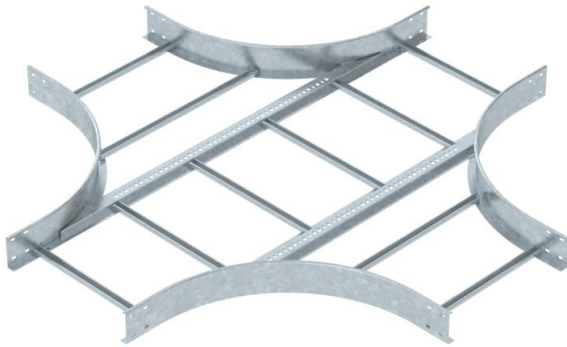

|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

### Master data

|                                    |                              |
|------------------------------------|------------------------------|
| Item number                        | 6219708                      |
| Type                               | LK 1150 R5 FT                |
| Description 1                      | Cross over                   |
| Description 2                      | for cable ladder, horizontal |
| Manufacturer                       | OBO                          |
| Dimension                          | 110x500                      |
| Colour                             | zinc                         |
| Material                           | Steel                        |
| Surface                            | Hot-dip galvanised           |
| Surface standard                   | DIN EN ISO 1461              |
| Smallest sales unit                | 1                            |
| Unit of quantity                   | Piece                        |
| Weight                             | 1731 kg                      |
| Weight unit                        | kg/100 pc.                   |
| CO2 Footprint (GWP) Cradle-to-Gate | 42,2135 kg CO2e / 1 Piece    |


# Technical data sheet

## 110 FT cross-over

Item number: 6219708



### Dimensions

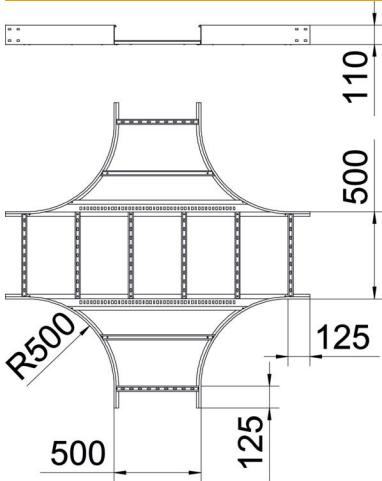

|             |        |
|-------------|--------|
| Width       | 500 mm |
| Height      | 110 mm |
| Dimension R | 500 mm |

### Technical data

|                               |                      |
|-------------------------------|----------------------|
| Version of the rungs          | Profile unperforated |
| Side rail version             | Profile (open)       |
| Maintain electrical functions | no                   |
| Rustproof steel, pickled      | no                   |
| Wide-span version             | no                   |
| Rail thickness                | 1.5 mm               |