

# Technical data sheet

## Cross-over 60 FT

Item number: 6214450



Cross-over for the creation of horizontal branches, fitting for cable ladders of side height 60 mm. With connector perforation. Can be used indoors and outdoors. Connector and fastening material must be ordered separately. Fittings must be supported by the support structure.



St

Steel

FT

Hot-dip galvanised

### Master data

|                                    |                              |
|------------------------------------|------------------------------|
| Item number                        | 6214450                      |
| Type                               | LK 620 R5 FT                 |
| Description 1                      | Cross over                   |
| Description 2                      | for cable ladder, horizontal |
| Manufacturer                       | OBO                          |
| Dimension                          | 60x200                       |
| Colour                             | zinc                         |
| Material                           | Steel                        |
| Surface                            | Hot-dip galvanised           |
| Surface standard                   | DIN EN ISO 1461              |
| Smallest sales unit                | 1                            |
| Unit of quantity                   | Piece                        |
| Weight                             | 1018 kg                      |
| Weight unit                        | kg/100 pc.                   |
| CO2 Footprint (GWP) Cradle-to-Gate | 27,5203 kg CO2e / 1 Piece    |


# Technical data sheet

## Cross-over 60 FT

Item number: 6214450



### Dimensions

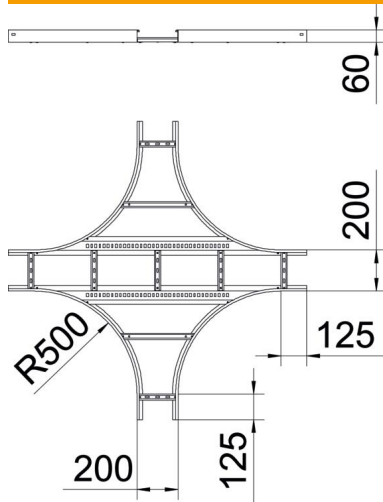

|             |        |
|-------------|--------|
| Width       | 200 mm |
| Height      | 60 mm  |
| Dimension B | 200 mm |
| Dimension R | 500 mm |

### Technical data

|                               |                      |
|-------------------------------|----------------------|
| Version of the rungs          | Profile unperforated |
| Side rail version             | Flat profile         |
| Maintain electrical functions | no                   |
| Rustproof steel, pickled      | no                   |
| Wide-span version             | no                   |
| Rail thickness                | 1.5 mm               |