

# Technical data sheet

## Base, MultiBase + NPE with remote signalling

Item number: 5096657




- Suitable for V 25-B+C, V 20-C and V10-C
- Pre-mounted and ready for connection
- Multifunction terminals for easy connection to series-mounted devices
- Upper parts can be rotated through 180 degrees
- With remote signalling, potential-free NO contact, for function monitoring
- 3+1 protection circuit for TN-S and TT network systems



### Master data

|                                    |                                |
|------------------------------------|--------------------------------|
| Item number                        | 5096657                        |
| Type                               | MB 2+NPE+FS                    |
| Description 1                      | MultiBase                      |
| Description 2                      | 2-pole + NPE w. signal contact |
| Manufacturer                       | OBO                            |
| Dimension                          | 2+NPE+FS                       |
| Smallest sales unit                | 1                              |
| Unit of quantity                   | Piece                          |
| Weight                             | 21.3 kg                        |
| Weight unit                        | kg/100 pc.                     |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,9474 kg CO2e / 1 Piece       |

### Dimensions

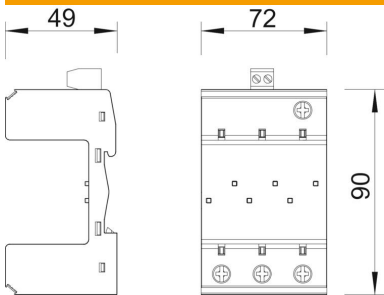

# Technical data sheet

Base, MultiBase + NPE with remote signalling

Item number: 5096657



## Technical data

|                                                                 |                     |
|-----------------------------------------------------------------|---------------------|
| Version for                                                     | 2+NPE               |
| Pole version                                                    | 2+N/PE              |
| Structural width in division units<br>(division unit, 17.5 mm)  | 3                   |
| Operating temperature, max.                                     | 80 °C               |
| Operating temperature, min.                                     | -40 °C              |
| Remote signalling                                               | yes                 |
| Conductor cross-section, rigid<br>(single-wire/multiwire), max. | 35 mm <sup>2</sup>  |
| Conductor cross-section, rigid<br>(single-wire/multiwire), min. | 2.5 mm <sup>2</sup> |
| Installation type                                               | DIN rail 35 mm      |
| Network form                                                    | Other               |
| Protection rating                                               | IP20                |
| Permitted temperature range,<br>max.                            | 80 °C               |
| Permitted temperature range,<br>min.                            | -40 °C              |