

Technical data sheet

Mounting support, 2 x type A

Item number: 7407846



Mounting support to accept two data connection modules of the following types:
AMP TYCO: Standard 110Connect, SL Series 110Connect and Toolless, AMP-Twist; Brand-Rex: unshielded; GG45; TKM RJ MOD; Nexans: LANmark with Adapter-Clip; Siemon CAT6; 3M K6 and K10.
Dimensions of a mounting opening in mm: 20.10 x 14.80.

Suitable for GE2 installation unit without floor covering recess.



A2

Stainless steel

| Master data | | |
|------------------------------------|-----------------------------|--|
| Item number | 7407846 | |
| Type | MTGE2 2A | |
| Description 1 | Mounting plate | |
| Description 2 | with 2x hole pattern Type A | |
| Manufacturer | OBO | |
| Dimension | 116x36x34 | |
| Material | Stainless steel | |
| Smallest sales unit | 1 | |
| Unit of quantity | Piece | |
| Weight | 4.8 kg | |
| Weight unit | kg/100 pc. | |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,702 kg CO2e / 1 Piece | |


Technical data sheet

Mounting support, 2 x type A


Item number: 7407846



Dimensions

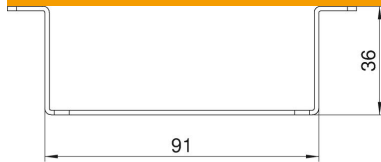

Length 116 mm

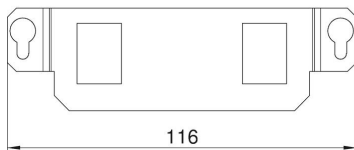

Technical data

| | |
|---|---------------|
| Number of installable devices | 2 |
| Number of strain reliefs | 0 |
| Version for | Support shape |
| Fastening type | Lockable |
| Labelling panel | no |
| Floor covering protection frame | no |
| Floor plate | no |
| Lowerable to be flush-floor | no |
| Seal installation option | no |
| Installation opening for on-floor tank | no |
| Decouplable | no |
| Suitable for raised floor installation | yes |
| Suitable for screed-flush closed underfloor ducts | yes |
| Suitable for screed-covered underfloor ducts | yes |
| Suitable for cavity floor installation | yes |
| Suitable for underfloor ducts | yes |
| With floor covering recess | no |
| Heavy-duty version | no |
| Depth | 36 mm |
| Strain relief option | yes |