


# Technical data sheet

## Mounting lid for GES6, 800 mm

Item number: 7402056



With mounting opening for the installation of an installation unit of nominal size 6.  
Mounting opening closed with blanking lid plate. Lid fixing screws contained in scope of delivery.

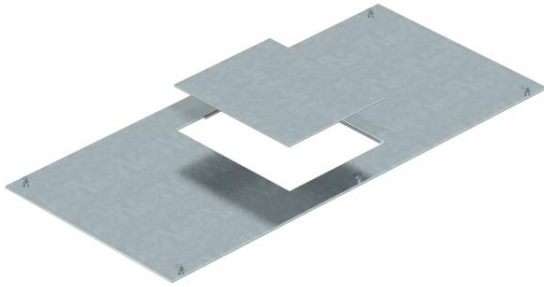

|           |                  |
|-----------|------------------|
| <b>St</b> | Steel            |
| <b>FS</b> | Strip galvanized |

### Master data

|                                    |                           |
|------------------------------------|---------------------------|
| Item number                        | 7402056                   |
| Type                               | OKA DG6 400               |
| Description 1                      | Mounting lid              |
| Description 2                      | for trunking system OKA2  |
| Manufacturer                       | OBO                       |
| Dimension                          | 800x400x4                 |
| Material                           | Steel                     |
| Surface                            | Strip galvanized          |
| Surface standard                   | DIN EN 10346              |
| Smallest sales unit                | 1                         |
| Unit of quantity                   | Piece                     |
| Weight                             | 905 kg                    |
| Weight unit                        | kg/100 pc.                |
| CO2 Footprint (GWP) Cradle-to-Gate | 24,9692 kg CO2e / 1 Piece |


# Technical data sheet

## Mounting lid for GES6, 800 mm

Item number: 7402056



### Dimensions

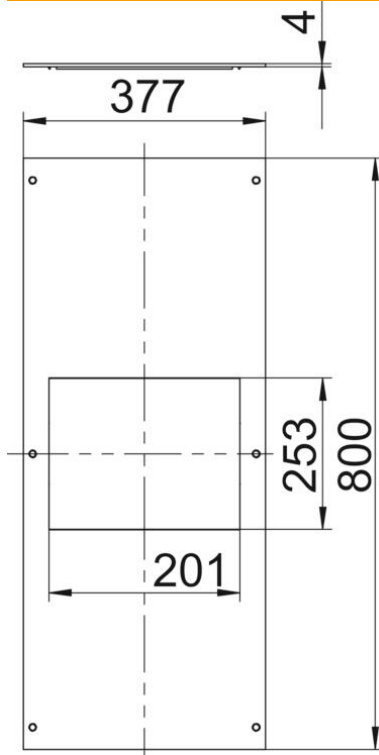

|             |        |
|-------------|--------|
| Length      | 800 mm |
| Width       | 400 mm |
| Dimension a | 201 mm |
| Dimension A | 377 mm |
| Dimension b | 253 mm |

### Technical data

|                             |                    |
|-----------------------------|--------------------|
| Mounting opening cover      | yes                |
| Number of mounting openings | 1                  |
| Cover fastening, locking    | no                 |
| Material thickness          | 4 mm               |
| Mounting opening            | Rectangular        |
| Mounting opening            | For service outlet |