

# Technical data sheet

Height-adjustable cassette for inspection opening,  
RKNUZD3, stainless steel  
Item number: 7409060



Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size 4 in dry or wet-cleaned floors for indoor use, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a blanking lid DUG../4 or in UGD250-3/4 or UGD350-3/4. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings. Height-adjustable cassette as a blind cassette, two-compartment 2. APMT2 cover plates can be installed. For the installation of 2 UT3 universal supports for 4 individual installation devices with support ring/support clamp or 6 Modul 45 devices.



VA Stainless steel, grade 354/1

## Master data


|                     |                              |
|---------------------|------------------------------|
| Item number         | 7409060                      |
| Type                | RKN2 UZD3 4VS25              |
| Description 1       | Square cassette              |
| Description 2       | blank                        |
| Manufacturer        | OBO                          |
| Dimension           | 200x200mm                    |
| Material            | Stainless steel, grade 354/1 |
| Smallest sales unit | 1                            |
| Unit of quantity    | Piece                        |
| Weight              | 222 kg                       |
| Weight unit         | kg/100 pc.                   |

# Technical data sheet

Height-adjustable cassette for inspection opening,  
RKNUZD3, stainless steel  
Item number: 7409060



## Dimensions

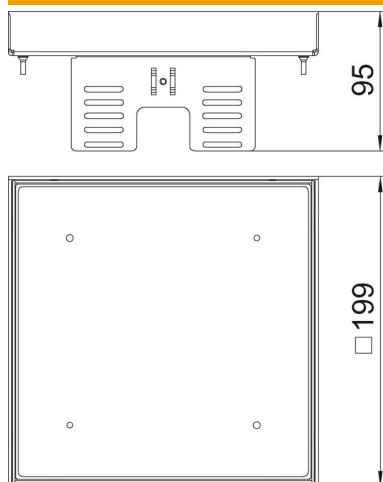

|             |        |
|-------------|--------|
| Length      | 199 mm |
| Width       | 199 mm |
| Height      | 95 mm  |
| Dimension h | 95 mm  |

## Technical data

|  |                 |
|--|-----------------|
| Number of installable devices              | 0               |
| Number of cable outlets                    | 0               |
| Version for                                | Square          |
| Cable outlet version                       | No cable outlet |
| Floor care                                 | Wet             |
| Decouplable                                | yes             |
| Screed height, min.                        | 105 mm          |
| Floor height, min.                         | 95 mm           |
| Suitable for raised floor installation     | yes             |
| Suitable for cavity floor installation     | yes             |
| Suitable for underfloor box                | 250/350         |
| Device support to accept mounting boxes    | no              |
| Length of installation dimensions          | 201 mm          |
| Nominal size for device installation units | 4               |
| Protection rating (IP) when used           | IP00            |
| Protection rating (IP) when unused         | IP44            |
| Protection rating IK code                  | IK10            |
| Heavy-duty version                         | no              |
| Installation system type                   | UT3             |
| Vertical load, large area                  | to 10,000 N     |
| Vertical load, small area                  | to 3,000 N      |
| Approvals                                  | VDE             |