

Technical data sheet

Height-adjustable heavy-duty cassette, blank, RKRSL, nominal size R7, stainless steel
Item number: 7409094



Round, "blank", heavy-duty cassette of nominal size R7 for the creation of an inspection opening in trunking systems, raised and cavity floors, in dry or wet-cleaned floors for indoor use. Load class 2 to 20 kN. Only suitable for smooth floor coverings.

Height-adjustable heavy-duty cassette as a blind cassette with a load bearing capacity of 2–20 kN, 3-compartment for indoor use. 2 APMT2 cover plates and 1 APMT5 cover plate can be installed. For the installation of 2 UT3 universal supports and one UT4 universal support for 7 individual installation devices with support ring/support clamp or 10 Modul 45 devices.



A2 Stainless steel

Master data

Item number	7409094
Type	RKR2 7SL2 V2 25
Description 1	Heavy-duty cassette
Description 2	blank, 20 kN
Manufacturer	OBO
Dimension	Ø275mm
Material	Stainless steel 1.4301
Smallest sales unit	1
Unit of quantity	Piece
Weight	966 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	20,4004 kg CO2e / 1 Piece


Technical data sheet

Height-adjustable heavy-duty cassette, blank, RKRSL, nominal size R7, stainless steel

Item number: 7409094



Dimensions

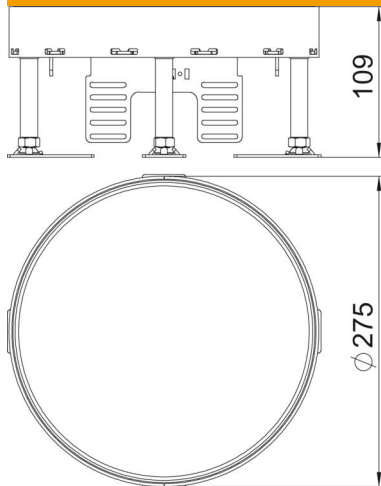

Dimension h 109 mm

Technical data

Number of installable devices	0
Version for	Round
Cable outlet version	No cable outlet
Floor care	Wet
Decouplable	no
Floor height, max.	159 mm
Floor height, min.	109 mm
Suitable for raised floor installation	yes
Suitable for cavity floor installation	yes
Suitable for underfloor box	350
Device support to accept mounting boxes	yes
Nominal size for device installation units	R7
Height-adjustment range, max.	159 mm
Height-adjustment range, min.	109 mm
Protection rating (IP) when used	IP00
Protection rating (IP) when unused	IP44
Protection rating IK code	IK10
Heavy-duty version	yes
Heavy load class	20 kN (OBO SL2)
Installation system type	UT3 / UT4
Floor covering thickness	25 mm