

Technical data sheet

Height-adjustable heavy-duty cassette, blank, RKRSL, nominal size R9, stainless steel
Item number: 7409112



Round, "blank", heavy-duty cassette of nominal size R9 for the creation of an inspection opening in trunking systems, raised and cavity floors, in dry or wet-cleaned floors for indoor use. Load class 2 to 20 kN. Only suitable for smooth floor coverings.

Height-adjustable heavy-duty cassette as a blind cassette with a load bearing capacity of 2–20 kN, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.
Height-adjustable round heavy-duty cassette as blanking cassette to create an inspection opening. For the installation in trunking systems, raised and cavity floors in dry- or wet-cleaned floors in indoor areas. Load class 2 to 20 kN.



A2 Stainless steel

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 7409112 |
| Type | RKR2 9SL2 V2 20 |
| Description 1 | Heavy-duty cassette |
| Description 2 | blank, 20 kN |
| Manufacturer | OBO |
| Dimension | Ø305mm |
| Material | Stainless steel 1.4301 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 664 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 22,842 kg CO2e / 1 Piece |


Technical data sheet

Height-adjustable heavy-duty cassette, blank, RKRSL, nominal size R9, stainless steel

Item number: 7409112



Dimensions

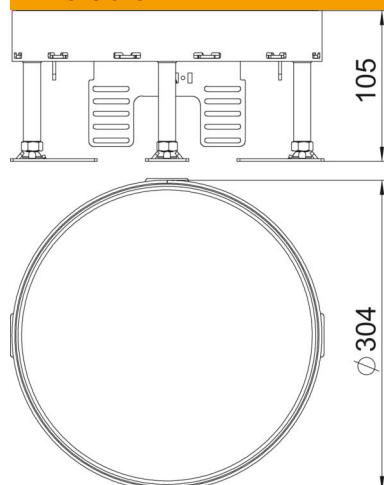

Dimension h 105 mm

Technical data

| | |
|--------------------------------------------|-----------------|
| Number of installable devices | 0 |
| Version for | Round |
| Cable outlet version | No cable outlet |
| Floor care | Wet |
| Decouplable | no |
| Floor height, max. | 155 mm |
| Floor height, min. | 105 mm |
| Suitable for raised floor installation | yes |
| Suitable for cavity floor installation | yes |
| Suitable for underfloor box | 350 |
| Device support to accept mounting boxes | yes |
| Nominal size for device installation units | R9 |
| Height-adjustment range, max. | 155 mm |
| Height-adjustment range, min. | 105 mm |
| Protection rating (IP) when used | IP00 |
| Protection rating (IP) when unused | IP44 |
| Protection rating IK code | IK10 |
| Heavy-duty version | yes |
| Heavy load class | 20 kN (OBO SL2) |
| Installation system type | UT4 |
| Floor covering thickness | 20 mm |