


# Technical data sheet

**Height-adjustable cassette with cord outlet, RKSNUZD3, stainless steel**

**Item number: 7409240**

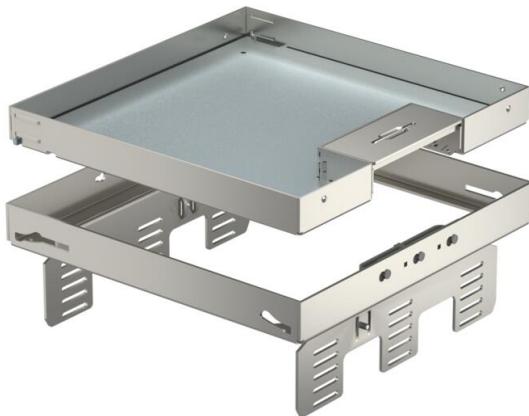

Height-adjustable cassette, decoupled from the floor, of nominal size 9, with cord outlet, for the installation of accessories in dry-cleaned floors indoors, for mounting in underfloor boxes UZD250 or UZD350, either in conjunction with a mounting cover DUG../9 or in UGD250-3/9 or UGD350-3/9. Mounting takes place using height-adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.

Height-adjustable cassette for cord outlet, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.



**A2** Stainless steel

## Master data

|                                    |                           |
|------------------------------------|---------------------------|
| Item number                        | 7409240                   |
| Type                               | RKSNUZD3 9VS25            |
| Description 1                      | Square cassette           |
| Description 2                      | with cord outlet          |
| Manufacturer                       | OBO                       |
| Dimension                          | 243x243mm                 |
| Material                           | Stainless steel 1.4301    |
| Smallest sales unit                | 1                         |
| Unit of quantity                   | Piece                     |
| Weight                             | 346 kg                    |
| Weight unit                        | kg/100 pc.                |
| CO2 Footprint (GWP) Cradle-to-Gate | 21,9883 kg CO2e / 1 Piece |


# Technical data sheet

Height-adjustable cassette with cord outlet, RKSNUZD3,  
stainless steel


Item number: 7409240



## Dimensions



|             |        |
|-------------|--------|
| Length      | 243 mm |
| Width       | 243 mm |
| Height      | 95 mm  |
| Dimension h | 95 mm  |



## Technical data

|  |                         |
|--|-------------------------|
| Number of installable devices              | 12                      |
| Number of mounting boxes                   | 3                       |
| Number of cable outlets                    | 1                       |
| Version for                                | Square                  |
| Cable outlet version                       | Swivellable cord outlet |
| Floor care                                 | Dry                     |
| Decouplable                                | yes                     |
| Floor height, min.                         | 110 mm                  |
| Suitable for raised floor installation     | yes                     |
| Suitable for cavity floor installation     | yes                     |
| Suitable for underfloor box                | 250/350                 |
| Device support to accept mounting boxes    | yes                     |
| Length of installation dimensions          | 244 mm                  |
| Nominal size for device installation units | 9                       |
| Standard                                   | EN 50085-2-2            |
| Protection rating (IP) when used           | IP20                    |
| Protection rating (IP) when unused         | IP40                    |
| Protection rating IK code                  | IK10                    |
| Heavy-duty version                         | no                      |
| Installation system type                   | UT4                     |
| Vertical load, large area                  | to 3,000 N              |
| Vertical load, small area                  | to 3,000 N              |
| Approvals                                  | VDE                     |
| Floor covering thickness                   | 25 mm                   |