

# Technical data sheet

## Electrogalvanised steel bend, without thread

Item number: 2046813



90° bend with moulded sleeves, for electrical installation pipes according to EN 61386-1. With burr-free inner wall.



|           |                   |
|-----------|-------------------|
| <b>St</b> | Steel             |
| <b>G</b>  | Electrogalvanized |

### Master data

|                                    |                            |
|------------------------------------|----------------------------|
| Item number                        | 2046813                    |
| Type                               | SBN50 G                    |
| Description 1                      | Conduit plug-in bend       |
| Description 2                      | without thread             |
| Manufacturer                       | OBO                        |
| Dimension                          | Ø50mm                      |
| Material                           | Steel                      |
| Surface                            | Electrogalvanized          |
| Surface standard                   | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit                | 5                          |
| Unit of quantity                   | Piece                      |
| Weight                             | 111.8 kg                   |
| Weight unit                        | kg/100 pc.                 |
| CO2 Footprint (GWP) Cradle-to-Gate | 3,7664 kg CO2e / 1 Piece   |


# Technical data sheet

## Electrogalvanised steel bend, without thread

Item number: 2046813



### Dimensions

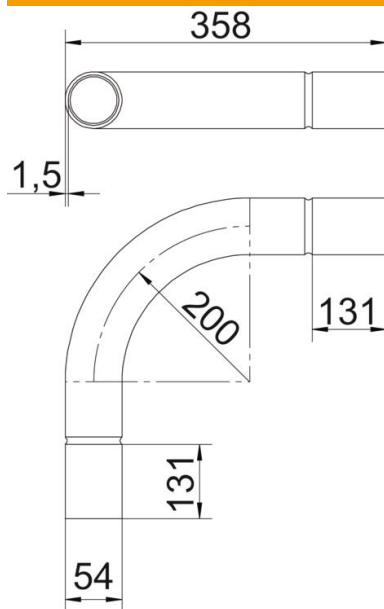

|                  |        |
|------------------|--------|
| Dimension A      | 131 mm |
| Dimension B      | 358 mm |
| Dimension D      | 54 mm  |
| Dimension d      | 51 mm  |
| Dimension l      | 60 mm  |
| Dimension m (mm) | M50    |
| Dimension R      | 200 mm |
| Dimension t      | 1.5 mm |

### Technical data

|                                 |           |
|---------------------------------|-----------|
| Version for                     | Connector |
| Flexible                        | no        |
| For nominal pipe diameter       | 50 mm     |
| Halogen-free                    | no        |
| With inspection opening and lid | no        |
| With sleeve                     | yes       |
| Brushed surface                 | no        |
| Polished surface                | no        |
| Angle of the bend               | 90 °      |
| Two-part                        | no        |