

# Technical data sheet

## Fine protection for 15-pole RS232 interface

Item number: 5080150



Data cable protection device for serial interfaces

- Various connection technologies available
- Low voltage protection level


Application: PLC, alarm systems, controllers



### Master data

Item number	5080150
Type	SD15-V24 15
Description 1	Data line protection device
Description 2	for V24 interface D-SUB 15
Manufacturer	OBO
Dimension	12V
Smallest sales unit	1
Unit of quantity	Piece
Weight	7 kg
Weight unit	kg/100 pc.

### Dimensions

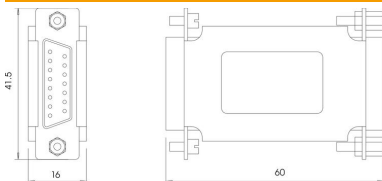

Length	60 mm
Width	16 mm
Height	41.5 mm


# Technical data sheet

## Fine protection for 15-pole RS232 interface

Item number: 5080150



### Technical data

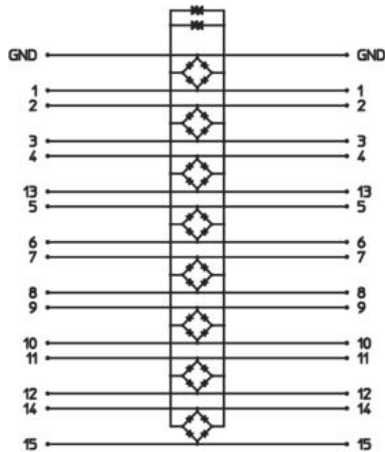

Arrestor monitoring	no
Response time	<10 ns
Number of poles	15
Version for	SUB-D-15; V24 RS232
Explosion-tested version	no
Telecommunications contact	no
Maximum continuous voltage AC	12
Maximum continuous voltage DC	18
Kategorie	Type 3 / C1
Lightning protection zone LPZ	2→3
Mounting type	Connector/cable adapter
Nominal voltage	12 V
Testing standard	IEC 61643-21
Shielding connection available	yes
Screening	Direct
Protection rating	IP40
Protection level wire-wire	<50 V
Protection level, wire-wire at 1 kV/ $\mu$ s (C3)	<25 V
Protection level wire-earth	<50 V
Protection level, wire-earth at 1 kV/ $\mu$ s (C3)	<25
SPD to IEC 61643-21	Class III / C1
Plug-in system	D-Sub 15-pin
Impulse durability wire-wire	0,34 kA (8/20 $\mu$ s)
Impulse durability wire-earth	0,34 kA (8/20 $\mu$ s)
Permitted temperature range, max.	80 °C
Permitted temperature range, min.	-40 °C