

# Technical data sheet

## AR45 socket unit, single, with labelling panel for horizontal device installation

Item number: 6119421



Pre-terminated socket unit with labelling panel, suitable for installation in Rapid 80 device installation trunking systems.

Socket unit, consisting of:

- Accessory mounting box, single, type 71GD8-2
- Protective contact socket, single, 0° connection direction, colour: see table
- Cover frame AR45, single, with labelling panel, type AR45-BF., colour: pure white

For installation in Rapid 80 device installation trunking and ISS service poles.

PC Polycarbonate

| Master data                        |                          |
|------------------------------------|--------------------------|
| Item number                        | 6119421                  |
| Type                               | SDE-RW D0RW1B            |
| Description 1                      | Socket unit              |
| Description 2                      | for single Modul 45      |
| Manufacturer                       | OBO                      |
| Dimension                          | 84x84x59mm               |
| Colour                             | Pure white; RAL 9010     |
| Material                           | Polycarbonate            |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 10.7 kg                  |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,6027 kg CO2e / 1 Piece |


# Technical data sheet

AR45 socket unit, single, with labelling panel for horizontal device installation


Item number: 6119421



## Dimensions

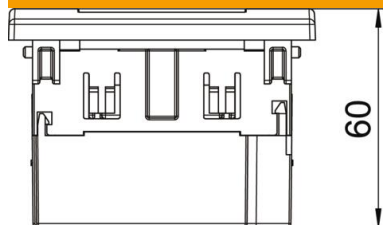

|        |       |
|--------|-------|
| Width  | 84 mm |
| Height | 84 mm |

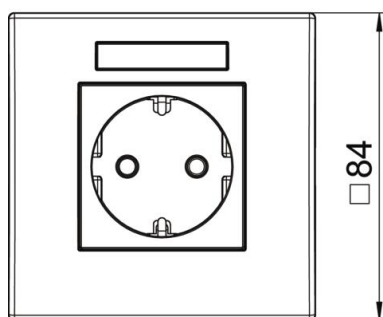

## Technical data

|                                                  |                    |
|--------------------------------------------------|--------------------|
| Cover                                            | Complete housing   |
| Closable                                         | no                 |
| Connection type                                  | Screwless terminal |
| Number of units                                  | 1                  |
| Number of modules (for modular construction)     | 0                  |
| Number of switchable sockets                     | 0                  |
| Number of poles                                  | 2                  |
| Printed label/coding                             | Without printing   |
| Version for                                      | Single 0°          |
| Surface version                                  | Matt               |
| Version for                                      | SCHUKO             |
| Ejection mechanism                               | no                 |
| Fastening type                                   | Lock               |
| Labelling panel                                  | yes                |
| increased touch protection                       | yes                |
| Error current protection                         | no                 |
| For more difficult conditions (according to VDE) | no                 |
| Power reserve                                    | no                 |
| Halogen-free                                     | yes                |
| Insulated installation                           | no                 |
| Hinged cover                                     | no                 |
| Coding                                           | no                 |
| Warning light                                    | no                 |
| With on/off switch                               | no                 |
| With fine-wire fuse                              | no                 |

# Technical data sheet

AR45 socket unit, single, with labelling panel for horizontal device installation

Item number: 6119421



## Technical data

|                           |                              |
|---------------------------|------------------------------|
| With functional lighting  | no                           |
| With orientation lighting | no                           |
| Mounting type             | Device installation duct     |
| Nominal voltage           | 250 V                        |
| Nominal current           | 16 A                         |
| Protection rating         | Other                        |
| Special power supply      | Without special power supply |
| Socket version            | Protective contact           |
| Socket angle              | 0°                           |
| Depth                     | 60 mm                        |
| Transparent               | no                           |
| Rotated central insert    | no                           |
| Surge protection          | no                           |