

Technical data sheet

Installation socket, 1+1 empty

Item no. 7408838



PA Polyamide


Installation socket for GES R2 floor socket for mounting in UD GES R2 screed box and in raised floor plates with an installation opening diameter of 122 mm.

The scope of supply contains a partition and two cover plates for the installation of individual Modul 45 devices. Up to two modular data sockets (Keystones) can be installed with optional mounting plate.

Master data

Item no.	7408838
Type	MT R2 1-1
Description 1	Mounting support for GES R2
Description 2	for 2x 1 Modul 45
Colour	Graphite black
RAL number	9011
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	1 Piece
Weight	19,80 kg/100 pc.

Technical data

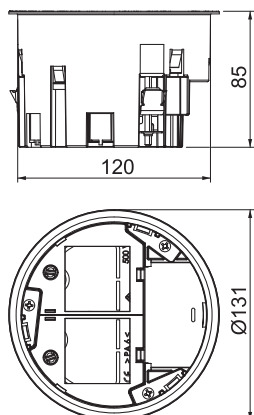

External diameter	131,00 mm
Installation diameter	122
Number of installable devices	2
Number of strain reliefs	1
Floor covering protection frame	☐
Cover version	Round
Seal installation option	☒
Installation depth	85,00 mm
Device type	Grid 45
Device support to accept mounting boxes	☐
Suitable for wet care	☐
Suitable for raised floor installation	☒
Suitable for cavity floor installation	☒
Suitable for underfloor ducts	☐
Installation technology	Grid M45
With floor covering recess	☐
Strain relief option	☒