


Technical data sheet

Trunking unit for GES9, height 40–140 mm

Item no. 7424200

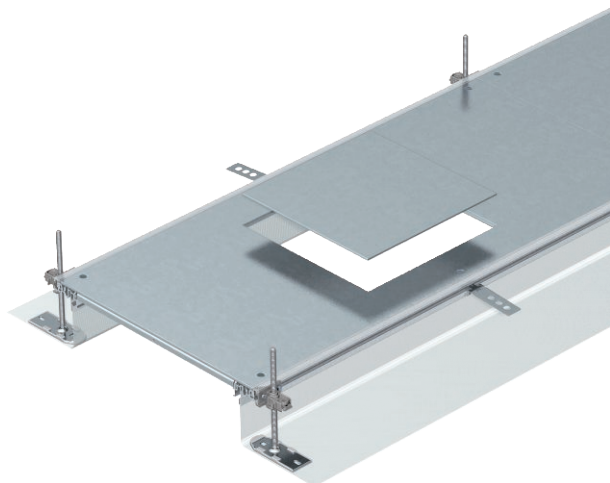

Ready-to-mount trunking unit with three or six device installation lids for cable laying and the installation of flush-mount units of nominal size 9, consisting of two side profiles with attached flexible side wall made of metal mesh, 4 mm floor covering contact profiles and trunking lid with blank covered mounting opening. The scope of supply contains six height-adjustable wall fixing brackets, six screed anchors and three height-adjustable cover joint supports for nominal trunking width 400 and six cover joint supports for nominal trunking widths 500 and 600. The essential levelling units (please observe adjustment height) for the lid butt supports 400, 500 and 600 are not contained in the scope of supply, please order separately. On delivery, the trunking lids are screwed on.

With three (for nominal trunking width 400, L = 800 mm) or six device installation lids (for nominal trunking widths 500 and 600, L = 400 mm) each with one installation opening for a square installation unit of nominal size 9.




St Steel

FS Strip galvanised

Master data

Item no.	7424200
Type	OKA-G40040140D9
Description 1	Flushfloor trunking unit
Description 2	for service unit GES9
Dimension	2400x400x140
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	2 m
Weight	1.431,70 kg/100 m

Technical data

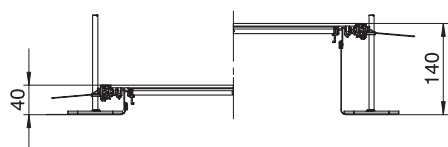

Length	2.400,00 mm
Width	400,00 mm
Covers	3,00 pc.
Mounting opening cover	<input checked="" type="checkbox"/>
Number of planned flush-mount units	3
Floor plate	<input type="checkbox"/>
Seal installation option	<input checked="" type="checkbox"/>
Cover fastening, locking	<input type="checkbox"/>
Installation opening for on-floor tank	<input type="checkbox"/>
Decouplable	<input checked="" type="checkbox"/>
Suitable for expansion joint	<input type="checkbox"/>
Mesh wall	<input checked="" type="checkbox"/>
Trunking height	40,00 - 140,00 mm
Cover material thickness	4,00 mm
Minimum screed height	40
With overhang	<input checked="" type="checkbox"/>
With separating retainer	<input type="checkbox"/>
With connection opening	<input checked="" type="checkbox"/>
With equipotential bonding	<input type="checkbox"/>
Mounting opening	For service outlet

Technical data sheet

Trunking unit for GES9, height 40–140 mm

Item no. 7424200



Technical data

Mounting opening	Square
Height-adjustment range	40,00 - 140,00 mm
Removable cover	<input checked="" type="checkbox"/>