

# Technical data sheet

## US 3 support A4

Item number: 6342485



U support in fixed lengths. Dimensions 30 x 50 mm.  
For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 25.



|    |                 |
|----|-----------------|
| A4 | Stainless steel |
| 2B | Bright, treated |

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6342485                  |
| Type                               | US 3 30 A4               |
| Description 1                      | U support                |
| Description 2                      | 3-sided perforated       |
| Manufacturer                       | OBO                      |
| Dimension                          | 50x30x300                |
| Colour                             | stainless steel          |
| Material                           | Stainless steel 1.4571   |
| Surface                            | Bright, treated          |
| Surface standard                   |                          |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 40 kg                    |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 2,3651 kg CO2e / 1 Piece |


# Technical data sheet

## US 3 support A4

Item number: 6342485



### Dimensions

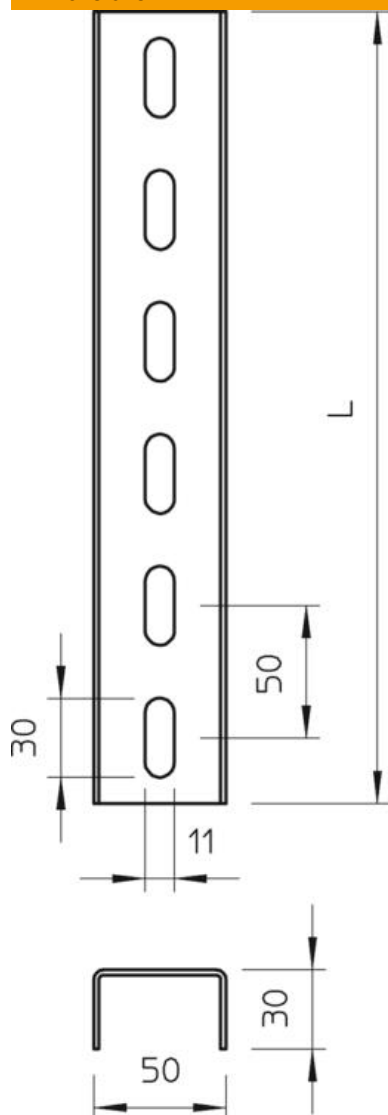

|           |               |
|-----------|---------------|
| Dimension | 30 x 50 x 2,0 |
| Length    | 300 mm        |
| Width     | 50 mm         |
| Height    | 30 mm         |

# Technical data sheet

US 3 support A4

Item number: 6342485



## Technical data

|                               |                      |
|-------------------------------|----------------------|
| Breakable                     | no                   |
| Type of perforation           | 3 sides perforated   |
| Version for                   | Single profile       |
| Maintain electrical functions | no                   |
| Material thickness            | 2 mm                 |
| With toothing                 | no                   |
| Profile shape                 | U profile            |
| Static value A                | 1.42 cm <sup>2</sup> |
| Static value I <sub>y</sub>   | 1.52 cm <sup>4</sup> |
| Static value I <sub>z</sub>   | 5.72 cm <sup>4</sup> |
| Static value W <sub>y</sub>   | 0.7 cm <sup>3</sup>  |
| Static value W <sub>z</sub>   | 2.29 cm <sup>3</sup> |