

Technical data sheet

UTC4 with 2+2 protective contact sockets, 2 sockets with surge protection

Item number: 7404678



The ready-for-connection UTC4 universal support possesses two pre-installed 33° protective contact sockets in pure white and two pre-installed 33° protective contact sockets in pure orange of 16 A. Suitable for VL connection cables and device installation units of nominal size R7, R9 and 9. The protective contact sockets in pure orange are protected by a type 3 surge protection module according to DIN EN 61643-11.



Master data

Item number	7404678
Type	UTC4 G W2OR2 Ü
Description 1	Universal support ConnectGST18
Description 2	double white,double orange,SPD
Manufacturer	OBO
Dimension	208x76x45
Smallest sales unit	1
Unit of quantity	Piece
Weight	31.3 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	1,2232 kg CO2e / 1 Piece



Technical data sheet

UTC4 with 2+2 protective contact sockets, 2 sockets with surge protection

Item number: 7404678



Dimensions

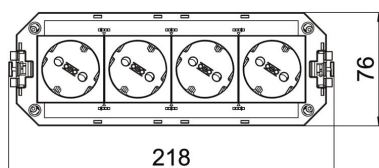

Length	218 mm
Width	76 mm
Height	60 mm

Technical data

Number of connections	2
Number of installable devices	4
Version for	Double pure white/double pure orange
Cable length	0 mm
Line cross-section	2.5 mm ²
Length of the supply cable	0 m
Socket combination	Double and double with surge protection
Plug-in system	GST18
Plug connector system, system-specific	yes
Circuit	2
System length	208 mm
Surge protection	yes