

Technical data sheet

UVS-WIN energy distributor with fixed connection, normal and special circuit

Item number: 6107984



Input: 2x three-phase circuit via a screwless terminal block, 5-pin, for cable cross-sections of 0.5–4 mm².

Output: 12 self-locking plug connectors, 3-pin, in white (6x) and black (6x), 25 A, type WINSTA® MIDI (socket part: 2x L1, 2x L2, 2x L3 for each rotary current circuit).

Internal wiring: PVC non-sheathed cable H07V-U2.5.

Input: 2x three-phase circuit via a screwless terminal block, 5-pin, for cable cross-sections of 0.5–4 mm².

Output: 12 self-locking plug connectors, 3-pin, in white (6x) and black (6x), 25 A, type WINSTA® MIDI (socket part: 2x L1, 2x L2, 2x L3 for each rotary current circuit).

Internal wiring: PVC non-sheathed cable H07V-U2.5.

St Steel

Master data

Item number	6107984
Type	UVS-WIN F6S6W
Description 1	Underfloor distributor
Description 2	Fixed connection, 12 WINSTA
Manufacturer	OBO
Dimension	300x196x46
Material	Steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	143 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	4,134 kg CO2e / 1 Piece


Technical data sheet

UVS-WIN energy distributor with fixed connection, normal and special circuit

Item number: 6107984



Dimensions

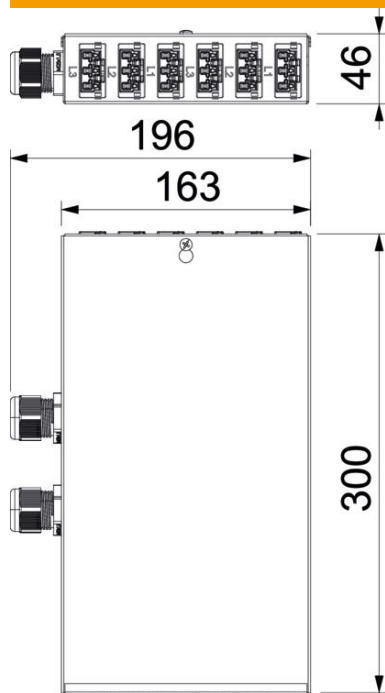

Length	300 mm
Width	163 mm
Height	46 mm

Technical data

Connection type	Terminal block
No. of outlets	12
Number of input circuits	2
Input	5-pole
Colour of the plug connector system	Black/white
Suitable for through wiring	no
Cross-section of the connection cable	4 mm ²
Plug connector system, system-specific	yes