

Technical data sheet

PV complete block 1,000 V DC with remote signalling

Item number: 5094232



Type 1+2 combination arrester according to EN 50539-11 for lightning and surge protection of PV systems.

- Lightning protection equipotential bonding according to IEC 62305 (VDE 0185-305)
- Surge protection according to IEC 60364-7-712 (VDE 0100-712)
- Arresting capacity to 12.5 kA (10/350) and 40 kA (8/20)
- Error-resistant Y circuit with status display
- The FS variant possesses a potential-free changeover contact for remote signalling

Application: Lightning current and surge protective devices for PV systems.



Master data

Item number	5094232
Type	V-PV-T1+2-1000FS
Description 1	CombiController V-PV
Description 2	Y-connection PV system + RS
Manufacturer	OBO
Dimension	1000V DC
Colour	Grey
Smallest sales unit	1
Unit of quantity	Piece
Weight	41.2 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,1535 kg CO2e / 1 Piece


Technical data sheet

PV complete block 1,000 V DC with remote signalling

Item number: 5094232




Dimensions

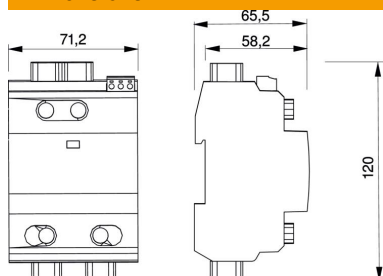

Length	65.5 mm
Width	71.2 mm
Height	120 mm

Technical data



Arrester surge current (8/20 µs) [total]	40 kA
Response time	<25 ns
Blow-out	no
Version for	Y configuration + RS
Pole version	Other
Structural width in division units (division unit, 17.5 mm)	4
Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C
Lightning surge current (10/350 µs)	6.25 kA
Lightning surge current (10/350)	12.5 kA
Remote signalling	yes
FM contacts	Changeover
Maximum continuous voltage DC	1000 V
Integrated back-up fuse	no
Conductor cross-section, flexible (fine-wire), max.	35 mm ²
Conductor cross-section, flexible (fine-wire), min.	2.5 mm ²
Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	2.5 mm ²
Lightning protection zone LPZ	0→2
Max. PV voltage	1000 V
Maximum discharge current (8/20 µs)	40 kA
Installation type	DIN rail 35 mm
Nominal discharge current (8/20 µs)	20 kA
Network form	DC
DC network form	yes
IT network form	no
Other network form	no
TN network form	no
TN-C network form	no
TN-C-S network form	no
TN-S network form	no
TT network form	no


Technical data sheet

PV complete block 1,000 V DC with remote signalling

Item number: 5094232



Technical data



OBO_Nominal load current (input/output terminal) 50 A

Test class, type 1 yes

Test class, type 2 yes

Protection rating IP20

Protection level $\leq 3,3$

Signalling on device Visual

SPD to EN 61643-11 Type 1+2

SPD to IEC 61643-1 Class I+II

Permitted temperature range, max. 80 °C

Permitted temperature range, min. -40 °C