


Technical data sheet

Distributor block, 3-pole, 1I/2O

Item number: 6108970



2x distributor, 3-pin, type WINSTA® MIDI.
1 input, 2 outputs with locking lever. 250 V, 25 A.

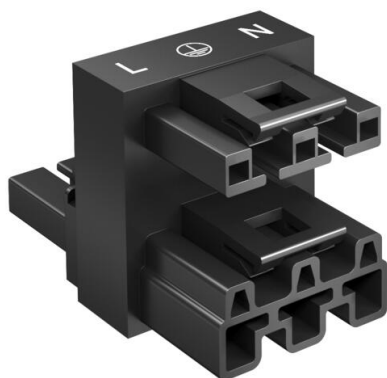

PA Polyamide

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 6108970 |
| Type | VB2-WIN 3P |
| Description 1 | Distribution block |
| Description 2 | 3pole,1I-2O, WINSTA |
| Manufacturer | OBO |
| Dimension | 51x30x33 |
| Colour | Black |
| Material | Polyamide |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 2.283 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0995 kg CO2e / 1 Piece |



Technical data sheet

Distributor block, 3-pole, 1I/2O


Item number: 6108970



Dimensions



| | |
|--------|-------|
| Length | 51 mm |
| Width | 30 mm |
| Height | 33 mm |



Technical data

| | |
|-----------------------------------|-----------------------------------|
| Connection type | Spring balancer connection |
| Type of locking | Integrated in plug connector |
| Rated surge voltage | 4 |
| Fire load | 0.11 |
| Built-in variants | Installation part/plug connection |
| Halogen-free | yes |
| Contact material | CuSn |
| Mechanical encoding | yes |
| Nominal voltage | 250 V |
| Nominal current | 25 A |
| Surface treatment of the contacts | Miscellaneous |
| Pin labelling | L, N, PE |
| Pole number | 3 |
| Protection rating | IP20 |
| Direction of insertion | Straight |
| Plug-in system | WINSTA® MIDI |
| Degree of soiling | 3 |