


# Technical data sheet

## Grip 10 flame-resistant

Item no. 2205388

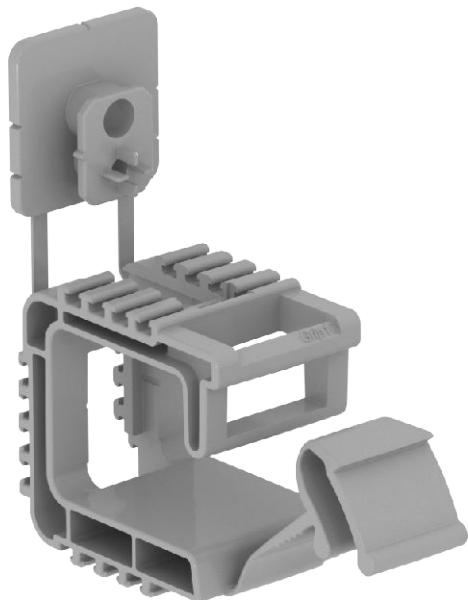

Cable tidy for general use with fastening holes of  $\varnothing 6$  mm, suitable for wall and ceiling mounting. The moulded fastening element can be fastened using knock-in anchors or a gas pressure nail gun. Flame-resistant version, stone grey, to DIN VDE 0471/DIN IEC 695 Part 2-1, test temperature 960 °C. The recommended fastening spacing when assigned fully is 50 to 60 cm.





PP Polypropylene

Additional product text 1	Capacity: 2031/ 10 max. 10 cables NYM 3 x 1.5 mm <sup>2</sup>
---------------------------	--

### Master data

Item no.	2205388
Type	2031 F 10
Description 1	Grip collecting clamp
Description 2	with arrangement contour, 960°C
Dimension	10x NYM3x1,5
Colour	Stone grey
RAL number	7030
Material	Polypropylene
Material symbol	PP
Smallest sales unit (VG)	50 Piece
Weight	1,41 kg/100 pc.

### Technical data



No. of conductors NYM 3 x 1.5	10
Flame-resistant version	<input checked="" type="checkbox"/>
Breaking load	0,32 kN
Suitable for maintaining electrical function	<input type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
With anchor	<input type="checkbox"/>